





FLAP DISCS

- p. 256  Professional
- p. 260  Performance
- p. 264  Grindflex
- p. 268  Smartflex
- p. 271  Specialty
- p. 275  Fast Lock



CLEANING

- p. 291  Surface Conditioning
- p. 293  Abrasive Nylon
- p. 294  Non woven



FINISHING AND POLISHING

- p. 295  Felt and abrasive pastes
- p. 297  Sisal, cotton and wool
- p. 300  Sponges and abrasive rubbers



CUTTING WHEELS

- p. 307  Cutting discs
- p. 310  Grinding discs
- p. 311  Grinding wheels with hole
- p. 312  Mounted grinding wheels
- p. 313  Diamond blades




ABRASIVE WHEELS

- p. 276  Wheels with shaft
- p. 277  Wheels with hole
- p. 278  Wheels for satin finishers







WIRE BRUSHES

- p. 301  Brushes with bore
- p. 303  Brushes with shaft




ABRASIVE DISCS AND BELTS

- p. 281  Fiber discs
- p. 282  Adhesive and velcro discs
- p. 286  Rolls and sheets
- p. 290  Belts

**MFDXZ****MINI FLAP DISC**


Fast lock. Long life, deburring and blending small areas, grinding edges.



Art.	Diameter ø	Grit	rpm max	Pack
MFD050/040Z	50 mm	40	25000	10
MFD050/060Z	50 mm	60	25000	10
MFD050/080Z	50 mm	80	25000	10
MFD050/120Z	50 mm	120	25000	10
MFD075/040Z	75 mm	40	20000	10
MFD075/060Z	75 mm	60	20000	10
MFD075/080Z	75 mm	80	20000	10
MFD075/120Z	75 mm	120	20000	10

**MFDXZC****CERAMIC MINI FLAP DISC**



Fast lock. Ceramic abrasive is hard and self sharpening, with faster stock removal and much longer life compared to zirconium. Ideal to work on edges or with heavy pressure.



Art.	Diameter ø	Grit	rpm max	Pack
MFD050/040ZC	50 mm	40	25000	10
MFD050/060ZC	50 mm	60	25000	10
MFD050/080ZC	50 mm	80	25000	10

MCDXZ**MINI CUP FLAP DISC**

Fast lock. Suited for contoured surfaces. More flexible and conformable compared to mini discs.

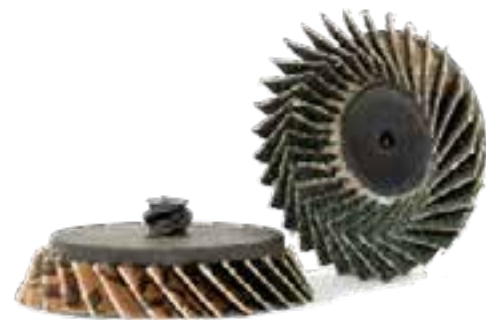

Art.	Diameter ø	Grit	rpm max	Pack
MCD050/040Z	50 mm	40	25000	10
MCD050/060Z	50 mm	60	25000	10
MCD050/080Z	50 mm	80	25000	10
MCD050/120Z	50 mm	120	25000	10

SGFX**RUBBER HOLDER**

Monobloc, suitable for all types of fast locks.



Art.	Diameter ø	Shank	rpm max
SGF050/06	50 mm	6 mm	30000
SGF075/06	75 mm	6 mm	28000

SFFX**RUBBER HOLDER**

In two parts both with M14 connection and pin, suitable for all types of fast-locks.



Art.	Diameter ø	Thread	Shank	rpm max
SFF050/M14	50 mm	M14	6 mm	30000
SFF075/M14	75 mm	M14	6 mm	28000

RMTX
MICRO FLAP WHEELS
ADR3/6
**ADAPTER FROM SHAFT 3 MM
TO 6 mm**


Art.	Diameter ø	H	Shank	Grit	rpm max	Pack
RMT1010/060	10 mm	10 mm	3 mm	60	26000	25
RMT1010/080	10 mm	10 mm	3 mm	80	26000	25
RMT1010/120	10 mm	10 mm	3 mm	120	26000	25
RMT1515/060	15 mm	15 mm	3 mm	60	26000	25
RMT1515/080	15 mm	15 mm	3 mm	80	26000	25
RMT1515/120	15 mm	15 mm	3 mm	120	26000	25

RGMX
MIXED NONWOVEN AND CLOTH WHEELS WITH SHAFT

Made of nonwoven flaps interspersed with abrasive cloth flaps arranged radially.



Art.	Dimensions	Shank	Cloth	Grit	Pack
RGM030/20M	30 x 20 mm	6 mm	A/O-M	60	10
RGM030/20F	30 x 20 mm	6 mm	A/O-F	100	10
RGM030/20VF	30 x 20 mm	6 mm	A/O-VF	150	10
RGM040/20M	40 x 20 mm	6 mm	A/O-M	60	10
RGM040/20F	40 x 20 mm	6 mm	A/O-F	100	10
RGM040/20VF	40 x 20 mm	6 mm	A/O-VF	150	10
RGM050/30M	50 x 30 mm	6 mm	A/O-M	60	10
RGM050/30F	50 x 30 mm	6 mm	A/O-F	100	10
RGM050/30VF	50 x 30 mm	6 mm	A/O-VF	150	10
RGM060/30M	60 x 30 mm	6 mm	A/O-M	60	10
RGM060/30F	60 x 30 mm	6 mm	A/O-F	100	10
RGM060/30VF	60 x 30 mm	6 mm	A/O-VF	150	10
RGM080/50M	80 x 50 mm	6 mm	A/O-M	60	10
RGM080/50F	80 x 50 mm	6 mm	A/O-F	100	10
RGM080/50VF	80 x 50 mm	6 mm	A/O-VF	150	10

RGTX
ALUMINIUM OXIDE SHAFT-MOUNTED CLOTH WHEELS


Art.	Dimensions	Stem	Grit	rpm max	Pack
RGT2010/40	20 x 10 mm	6 mm	40	26000	10
RGT2010/60	20 x 10 mm	6 mm	60	26000	10
RGT2010/80	20 x 10 mm	6 mm	80	26000	10
RGT2010/120	20 x 10 mm	6 mm	120	26000	10
RGT2015/40	20 x 15 mm	6 mm	40	25000	10
RGT2015/60	20 x 15 mm	6 mm	60	25000	10
RGT2015/80	20 x 15 mm	6 mm	80	25000	10
RGT2015/120	20 x 15 mm	6 mm	120	25000	10
RGT2515/60	25 x 15 mm	6 mm	60	25000	10
RGT2515/80	25 x 15 mm	6 mm	80	25000	10
RGT2515/120	25 x 15 mm	6 mm	120	25000	10
RGT2525/40	25 x 25 mm	6 mm	40	25000	10
RGT2525/60	25 x 25 mm	6 mm	60	25000	10
RGT2525/80	25 x 25 mm	6 mm	80	25000	10
RGT2525/120	25 x 25 mm	6 mm	120	25000	10
RGT3010/40	30 x 10 mm	6 mm	40	25500	10
RGT3010/60	30 x 10 mm	6 mm	60	25500	10
RGT3010/80	30 x 10 mm	6 mm	80	25500	10
RGT3010/120	30 x 10 mm	6 mm	120	25500	10
RGT3015/40	30 x 15 mm	6 mm	40	25500	10
RGT3015/60	30 x 15 mm	6 mm	60	25500	10
RGT3015/80	30 x 15 mm	6 mm	80	25500	10
RGT3015/120	30 x 15 mm	6 mm	120	22900	10
RGT3020/40	30 x 20 mm	6 mm	40	22900	10
RGT3020/60	30 x 20 mm	6 mm	60	22900	10
RGT3020/80	30 x 20 mm	6 mm	80	22900	10
RGT3020/120	30 x 20 mm	6 mm	120	25500	10
RGT4015/40	40 x 15 mm	6 mm	40	19100	10
RGT4015/60	40 x 15 mm	6 mm	60	19100	10
RGT4015/80	40 x 15 mm	6 mm	80	19100	10
RGT4015/120	40 x 15 mm	6 mm	120	19100	10
RGT4020/40	40 x 20 mm	6 mm	40	19100	10
RGT4020/60	40 x 20 mm	6 mm	60	19100	10
RGT4020/80	40 x 20 mm	6 mm	80	19100	10
RGT4020/120	40 x 20 mm	6 mm	120	19100	10
RGT4030/40	40 x 30 mm	6 mm	40	17100	10
RGT4030/60	40 x 30 mm	6 mm	60	17100	10
RGT4030/80	40 x 30 mm	6 mm	80	17100	10
RGT4030/120	40 x 30 mm	6 mm	120	17100	10
RGT5020/40	50 x 20 mm	6 mm	40	15300	10
RGT5020/60	50 x 20 mm	6 mm	60	15300	10
RGT5020/80	50 x 20 mm	6 mm	80	15300	10
RGT5020/120	50 x 20 mm	6 mm	120	15300	10
RGT5030/40	50 x 30 mm	6 mm	40	15300	10
RGT5030/60	50 x 30 mm	6 mm	60	15300	10
RGT5030/80	50 x 30 mm	6 mm	80	15300	10
RGT5030/120	50 x 30 mm	6 mm	120	15300	10
RGT6020/40	60 x 20 mm	6 mm	40	12700	10
RGT6020/60	60 x 20 mm	6 mm	60	12700	10
RGT6020/80	60 x 20 mm	6 mm	80	12700	10
RGT6020/120	60 x 20 mm	6 mm	120	12700	10
RGT6030/40	60 x 30 mm	6 mm	40	12700	10
RGT6030/60	60 x 30 mm	6 mm	60	12700	10
RGT6030/80	60 x 30 mm	6 mm	80	12700	10
RGT6030/120	60 x 30 mm	6 mm	120	12700	10



RFTX

ALUMINIUM OXIDE CLOTH WHEELS WITH HOLE

The wheel can be configured on the profile of the workpiece. Lubricating the wheel with oil or fat, it improves the degree of finish, the duration of the wheel and is held action dustproof.



Art.	Dimensions	Grit	rpm max
RFT165/25040	165 x 25 x 54 mm	40	5200
RFT165/25060	165 x 25 x 54 mm	60	5200
RFT165/25080	165 x 25 x 54 mm	80	5200
RFT165/25120	165 x 25 x 54 mm	120	5200
RFT165/25220	165 x 25 x 54 mm	220	5200
RFT165/30040	165 x 30 x 54 mm	40	5200
RFT165/30060	165 x 30 x 54 mm	60	5200
RFT165/30080	165 x 30 x 54 mm	80	5200
RFT165/30120	165 x 30 x 54 mm	120	5200
RFT165/30220	165 x 30 x 54 mm	220	5200
RFT165/50040	165 x 50 x 54 mm	40	5200
RFT165/50060	165 x 50 x 54 mm	60	5200
RFT165/50080	165 x 50 x 54 mm	80	5200
RFT165/50120	165 x 50 x 54 mm	120	5200
RFT165/50220	165 x 50 x 54 mm	220	5200
RFT165/50040A	165 x 50 x 25 mm	40	5200
RFT165/50060A	165 x 50 x 25 mm	60	5200
RFT165/50080A	165 x 50 x 25 mm	80	5200
RFT165/50120A	165 x 50 x 25 mm	120	5200
RFT165/50220A	165 x 50 x 25 mm	220	5200
RFT200/50040	200 x 50 x 54 mm	40	3800
RFT200/50060	200 x 50 x 54 mm	60	3800
RFT200/50080	200 x 50 x 54 mm	80	3800
RFT200/50120	200 x 50 x 54 mm	120	3800
RFT250/50040	250 x 50 x 100 mm	40	3400
RFT250/50060	250 x 50 x 100 mm	60	3400
RFT250/50080	250 x 50 x 100 mm	80	3400
RFT250/50120	250 x 50 x 100 mm	120	3400

FRFX

PAIR OF FLANGES



Art.	Size	Hole
FRF54/20	54 mm	20 mm
FRF54/25	54 mm	25 mm

RGPX

NONWOVEN WHEELS WITH SHAFT

Flaps arranged radially.




Art.	Dimensions	Shank	Grit	Pack
RGPO30/20C	30 x 20 mm	6 mm	COARSE	10
RGPO30/20M	30 x 20 mm	6 mm	MEDIUM	10
RGPO30/20F	30 x 20 mm	6 mm	FINE	10
RGPO30/20VF	30 x 20 mm	6 mm	VERY FINE	10
RGPO40/20C	40 x 20 mm	6 mm	COARSE	10
RGPO40/20M	40 x 20 mm	6 mm	MEDIUM	10
RGPO40/20F	40 x 20 mm	6 mm	FINE	10
RGPO40/20VF	40 x 20 mm	6 mm	VERY FINE	10
RGPO50/30C	50 x 30 mm	6 mm	COARSE	10
RGPO50/30M	50 x 30 mm	6 mm	MEDIUM	10
RGPO50/30F	50 x 30 mm	6 mm	FINE	10
RGPO50/30VF	50 x 30 mm	6 mm	VERY FINE	10
RGPO60/30C	60 x 30 mm	6 mm	COARSE	10
RGPO60/30M	60 x 30 mm	6 mm	MEDIUM	10
RGPO60/30F	60 x 30 mm	6 mm	FINE	10
RGPO60/30VF	60 x 30 mm	6 mm	VERY FINE	10
RGPO80/50C	80 x 50 mm	6 mm	COARSE	10
RGPO80/50M	80 x 50 mm	6 mm	MEDIUM	10
RGPO80/50F	80 x 50 mm	6 mm	FINE	10
RGPO80/50VF	80 x 50 mm	6 mm	VERY FINE	10

RLFX

THREADED BORE FLAP WHEEL


Suited for angle grinders with M14 thread. remove light weld seams on round and irregular metal surfaces.




Art.	Size	Thread	Grit	rpm max
RLF115/040	Ø 115 x 20 mm	M14	40	9000
RLF115/060	Ø 115 x 20 mm	M14	60	9000
RLF115/080	Ø 115 x 20 mm	M14	80	9000
RLF115/120	Ø 115 x 20 mm	M14	120	9000
RLF125/040	Ø 115 x 20 mm	M14	40	9000
RLF125/060	Ø 125 X 20 mm	M14	60	9000
RLF125/080	Ø 125 X 20 mm	M14	80	9000
RLF125/120	Ø 125 X 20 mm	M14	120	9000

RFPX
NONWOVEN WHEELS WITH BORE


Made of nonwoven, flaps radially arranged.




Art.	Dimensions	Grit
RFP165/50M	165 x 50 x 65 mm	Medium
RFP165/50F	165 x 50 x 65 mm	Fine
RFP165/50VF	165 x 50 x 65 mm	Very Fine
RFP200/50M	200 x 50 x 110 mm	Medium
RFP200/50F	200 x 50 x 110 mm	Fine
RFP200/50VF	200 x 50 x 110 mm	Very Fine

RLMX
MIXED NONWOVEN WHEELS


Art.	Dimensions	Cloth	Grit	Hole diameter
RLM100/060C	100 x 100 mm	A/C	60	19 mm
RLM100/080M	100 x 100 mm	A/M	80	19 mm
RLM100/150F	100 x 100 mm	A/F	150	19 mm

NAS100X-Z
ZIRCONIUM CLOTH BELTS



Art.	Dimensions	Grit
NAS100/040Z	90 x 100 mm	40
NAS100/060Z	90 x 100 mm	60
NAS100/080Z	90 x 100 mm	80
NAS100/120Z	90 x 100 mm	120

RLTX
ABRASIVE CLOTH WHEELS



Art.	Dimensions	Grit	Hole diameter
RLT050/040	100 x 50 mm	40	19 mm
RLT050/060	100 x 50 mm	60	19 mm
RLT050/080	100 x 50 mm	80	19 mm
RLT050/120	100 x 50 mm	120	19 mm
RLT100/040	100 x 100 mm	40	19 mm
RLT100/060	100 x 100 mm	60	19 mm
RLT100/080	100 x 100 mm	80	19 mm
RLT100/120	100 x 100 mm	120	19 mm

RLPX
NONWOVEN WHEELS

Diversified color according to the grit.



Art.	Dimensions	Grit	Hole diameter
RLP100/C	100 x 100 mm	A/O-C	19 mm
RLP100/M	100 x 100 mm	A/O-M	19 mm
RLP100/F	100 x 100 mm	A/O-F	19 mm
RLP100/VF	100 x 100 mm	A/O-VF	19 mm

NAS100X-A
ALUMINIUM OXIDE CLOTH BELTS


Art.	Dimensions	Grit
NAS100/180A	90 x 100 mm	180
NAS100/240A	90 x 100 mm	240



NAS100X-C


CERAMIC BELTS



Art.	Dimensions	Grit
NAS100/040C	90 x 100 mm	40
NAS100/060C	90 x 100 mm	60
NAS100/080C	90 x 100 mm	80
NAS100/120C	90 x 100 mm	120

SCSX

SURFACE CONDITIONING BELTS



Art.	Dimensions	Grit
SCS100/C	90 x 100 mm	Coarse
SCS100/M	90 x 100 mm	Medium
SCS100/VF	90 x 100 mm	Very fine

ERW100


CENTRIFUGAL EXPANDING WHEEL



Dimensions	90 x 100 mm
Hole	19.1 mm
rpm max	6000

NAT100X

TRIZACT BELTS



Art.	Dimensions	Grit
NAT100/A006	90 x 100 mm	A6
NAT100/A016	90 x 100 mm	A16
NAT100/A030	90 x 100 mm	A30
NAT100/A045	90 x 100 mm	A45
NAT100/A065	90 x 100 mm	A65
NAT100/A100	90 x 100 mm	A100
NAT100/A160	90 x 100 mm	A160

RPW090

RUBBER PNEUMATIC WHEEL




Dimensions	90 x 90 mm
Hole	19.1 mm
rpm max	6000

SWS100

BRASS STEEL WIRE WHEELS

For deburring, stripping, removing rust and calamine and rustivating wood.




Dimensions	100 x 100 mm
Hole	19.1 mm
Wire	0.3 mm
rpm max	6800

SWS100/M

BRASS STEEL WIRE WHEELS

Suitable for Makita machines, for deburring, stripping, removing rust and calamine and rustivating wood




Dimensions	100 x 100 mm
Hole	13 mm
Wire	0.3 mm
rpm max	6800

NWS100

ABRASIVE NYLON WIRE WHEELS

For cleaning metals and rustivating wood.




Dimensions	100 x 100 mm
Hole	19.1 mm
Grit	80
rpm max	6800

NWS100/M

ABRASIVE NYLON WIRE WHEELS

Suitable for Makita machines, for cleaning metals and rustivating wood.



Dimensions	100 x 100 mm
Hole	13 mm
Grit	80
rpm max	6800






FDCX

VIPER SEMI FLEXIBLE FIBER DISC

Innovative semi flexible depressed center fiberdisc with built-in backing pad for a more precise, faster and comfortable grinding of welding seams, sharp edges, flat and curved surfaces.




Art.	Dimensions	Hardness	rpm max	Pack
FDC115/036	115x22,23 mm	SG 36	13300	25
FDC115/060	115x22,23 mm	SG 60	13300	25
FDC115/120	115x22,23 mm	SG 120	13300	25
FDC125/036	125x22,23 mm	SG 36	12250	25

DFVX-XZ

ADHESIVE VULCANISED FIBRE DISCS

Fiber discs are constituted by a vulcanised cellulose fiber support of 0,8 mm. thickness. Various types of abrasive are deposited on it. These are fastened with a double layer of thermosetting resin added with active fillers which give the products cooling and anti-clogging properties. Applied to a backing pad as support, the discs are used on portable sander.



Art.	Dimensions	Grit	rpm max	Pack
DFV115/036Z	115 x 22 mm	36	13300	25
DFV115/040Z	115 x 22 mm	40	13300	25
DFV115/060Z	115 x 22 mm	60	13300	25
DFV115/080Z	115 x 22 mm	80	13300	25
DFV115/120Z	115 x 22 mm	120	13300	25
DFV180/036Z	180 x 22 mm	36	8600	25
DFV180/040Z	180 x 22 mm	40	8600	25
DFV180/060Z	180 x 22 mm	60	8600	25
DFV180/080Z	180 x 22 mm	80	8600	25
DFV180/120Z	180 x 22 mm	120	8600	25

DFVX-XA

ADHESIVE VULCANISED FIBRE DISCS


Fiber discs are constituted by a vulcanised cellulose fiber support of 0,8 mm thickness. Various types of abrasive are deposited on it. These are fastened with a double layer of thermosetting resin added with active fillers which give the products cooling and anti-clogging properties. Applied to a backing pad as support, the discs are used on portable sander.




Art.	Dimensions	Grit	rpm max	Pack
DFV115/024A	115 x 22 mm	24	13300	25
DFV115/036A	115 x 22 mm	36	13300	25
DFV115/060A	115 x 22 mm	60	13300	25
DFV115/080A	115 x 22 mm	80	13300	25
DFV115/120A	115 x 22 mm	120	13300	25
DFV180/024A	180 x 22 mm	24	8600	25
DFV180/036A	180 x 22 mm	36	8600	25
DFV180/060A	180 x 22 mm	60	8600	25
DFV180/080A	180 x 22 mm	80	8600	25

PFBX
BACKING PADS

Standard backing pad for fibre discs, professional, hard.





Art.	Diameter ø	Thread	rpm max
PFB115	115 mm	M14	13300
PFB180	180 mm	M14	8500

PFSX
BACKING PADS


Art.	Diameter ø	Thread	rpm max
PFS115	115 mm	M14	13300
PFS180	180 mm	M14	8500

MDAXZT
FAST LOCK ZIRCONIUM TOP SIZE

Fast lock. Long life, deburring and blending small areas, grinding edges.

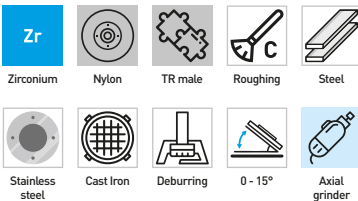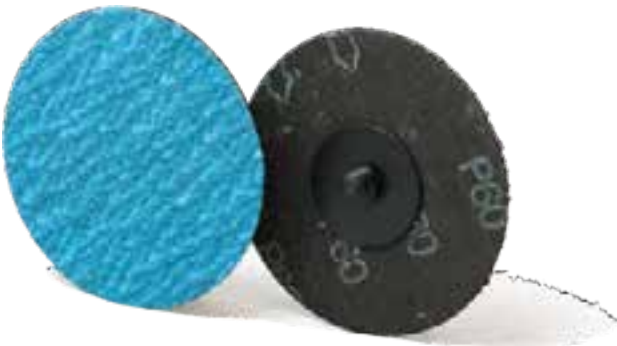

Art.	Diameter ø	Grit	rpm max	Pack
MDA050/036ZT	50 mm	36	25000	25
MDA050/060ZT	50 mm	60	25000	25
MDA050/080ZT	50 mm	80	25000	25
MDA050/120ZT	50 mm	120	25000	25
MDA075/036ZT	75 mm	36	20000	25
MDA075/060ZT	75 mm	60	20000	25
MDA075/080ZT	75 mm	80	20000	25
MDA075/120ZT	75 mm	120	20000	25

D17X
ADHESIVE ABRASIVE DISCS


Art.	Sizes	Grit	Pack
D174	150 mm	60	10
D175	150 mm	100	10
D178/060	200 mm	60	10
D178/100	200 mm	100	10
D176	226 mm	60	10
D177	226 mm	100	10



VDAX

NEW

VELCRO DISCS

Corundum resin coated on heavy paper (weight F), closed coat.



Art.	Diameter ø	Holes	Grit	Pack
VDA115/040	115 mm	-	40	50
VDA115/060	115 mm	-	60	100
VDA115/080	115 mm	-	80	100
VDA115/100	115 mm	-	100	100
VDA115/120	115 mm	-	120	100
VDA115/180	115 mm	-	180	100
VDA115/220	115 mm	-	220	100
VDA125/40F8	125 mm	8	40	50
VDA125/60F8	125 mm	8	60	100
VDA125/80F8	125 mm	8	80	100
VDA125/100F8	125 mm	8	100	100
VDA125/120F8	125 mm	8	120	100
VDA125/180F8	125 mm	8	180	100
VDA125/220F8	125 mm	8	220	100
VDA150/040	150 mm	-	40	50
VDA150/060	150 mm	-	60	100
VDA150/080	150 mm	-	80	100
VDA150/100	150 mm	-	100	100
VDA150/120	150 mm	-	120	100
VDA150/180	150 mm	-	180	100
VDA150/220	150 mm	-	220	100
VDA150/040F6	150 mm	6	40	50
VDA150/060F6	150 mm	6	60	100
VDA150/080F6	150 mm	6	80	100
VDA150/100F6	150 mm	6	100	100
VDA150/120F6	150 mm	6	120	100
VDA150/180F6	150 mm	6	180	100
VDA150/220F6	150 mm	6	220	100
VDA150/040F8	150 mm	8	40	10
VDA150/060F8	150 mm	8	60	10
VDA150/080F8	150 mm	8	80	10
VDA150/100F8	150 mm	8	100	10
VDA150/120F8	150 mm	8	120	10
VDA150/180F8	150 mm	8	180	10
VDA150/220F8	150 mm	8	220	10

VDGX

VELCRO DISCS "GOLD"


Double resin corundum stearate on light paper (weight C), semi-open coating. The addition of zinc stearate prevents clogging.



Art.	Diameter	Grit	Holes	Pack
VDG150/060	ø 150 mm	60	-	100
VDG150/080	ø 150 mm	80	-	100
VDG150/120	ø 150 mm	120	-	100
VDG150/150	ø 150 mm	150	-	100
VDG150/180	ø 150 mm	180	-	100
VDG150/220	ø 150 mm	220	-	100
VDG150/320	ø 150 mm	320	-	100
VDG150/400	ø 150 mm	400	-	100
VDG150/600	ø 150 mm	600	-	100
VDG150/800	ø 150 mm	800	-	100
VDG150/060F6	ø 150 mm	60	6	100
VDG150/080F6	ø 150 mm	80	6	100
VDG150/120F6	ø 150 mm	120	6	100
VDG150/150F6	ø 150 mm	150	6	100
VDG150/180F6	ø 150 mm	180	6	100
VDG150/220F6	ø 150 mm	220	6	100
VDG150/320F6	ø 150 mm	320	6	100
VDG150/400F6	ø 150 mm	400	6	100
VDG150/600F6	ø 150 mm	600	6	100
VDG150/800F6	ø 150 mm	800	6	100
VDG150/060F8	ø 150 mm	60	8	100
VDG150/080F8	ø 150 mm	80	8	100
VDG150/120F8	ø 150 mm	120	8	100
VDG150/150F8	ø 150 mm	150	8	100
VDG150/180F8	ø 150 mm	180	8	100
VDG150/220F8	ø 150 mm	220	8	100
VDG150/320F8	ø 150 mm	320	8	100
VDG150/400F8	ø 150 mm	400	8	100
VDG150/600F8	ø 150 mm	600	8	100
VDG150/800F8	ø 150 mm	800	8	100

ZSAX
VELCRO DISCS



Double resin corundum stearate on light paper (C weight), closed coat. The addition of zinc stearate prevents clogging.



Art.	Diameter ø	Holes	Grit	Pack
ZSA150/080	150 mm	-	80	100
ZSA150/120	150 mm	-	120	100
ZSA150/180	150 mm	-	180	100
ZSA150/240	150 mm	-	240	100
ZSA150/320	150 mm	-	320	100
ZSA150/400	150 mm	-	400	100
ZSA150/80F6	150 mm	6	80	100
ZSA150/120F6	150 mm	6	120	100
ZSA150/180F6	150 mm	6	180	100
ZSA150/240F6	150 mm	6	240	100
ZSA150/320F6	150 mm	6	320	100
ZSA150/400F6	150 mm	6	400	100

NEW
VDZX
VELCRO DISCS


Zirconium resin on heavy paper (weight F), closed coating. Top quality, very aggressive and long lasting, the backing resists the higher stresses and speeds of paper discs.

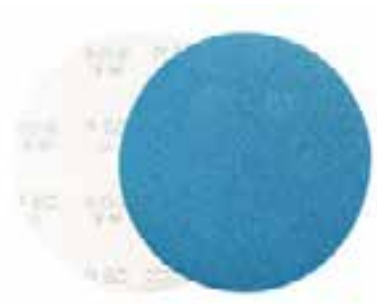

Art.	Diameter ø	Grit	Pack
VDZ115/040	115 mm	40	50
VDZ115/060	115 mm	60	100
VDZ115/080	115 mm	80	100
VDZ115/120	115 mm	120	100
VDZ125/040	125 mm	40	100
VDZ125/060	125 mm	60	100
VDZ125/080	125 mm	80	100
VDZ125/120	125 mm	120	100
VDZ150/040	150 mm	40	50
VDZ150/060	150 mm	60	100
VDZ150/080	150 mm	80	100
VDZ150/120	150 mm	120	100
VDZ150/040F8	150 mm	40	10
VDZ150/060F8	150 mm	60	10
VDZ150/080F8	150 mm	80	10
VDZ150/100F8	150 mm	100	10
VDZ150/120F8	150 mm	120	10

VDRX
VELCRO SANDING SCREEN

Support made of mesh allows you to vacuum up to 90% of the dust generated by abrasion, resists heat making them usable even with angle grinders, usable dry and wet. Longer service life and healthier working environment thanks to the suction of residues.

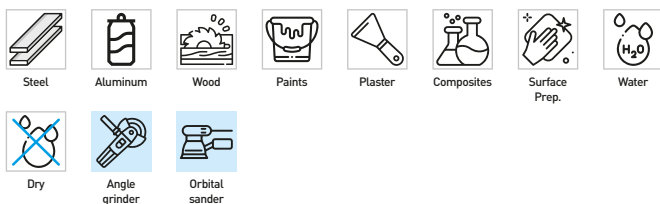

Art.	Diameter ø	Grit	Pack
VDR150/080	150 mm	80	50
VDR150/120	150 mm	120	50
VDR150/180	150 mm	180	50
VDR150/240	150 mm	240	50
VDR150/320	150 mm	320	50
VDR150/400	150 mm	400	50
VDR150/600	150 mm	600	50

PDBX
BACKING PADS WITHOUT FOAM

For velcro discs.



Art.	Diameter ø	Thread	rpm max
PDB115/M14	115 mm	M14	13300
PDB125/M14	125 mm	M14	12200
PDB150/M14	150 mm	M14	10000

PDMX
BACKING PADS WITH FOAM

Professional version, for velcro discs, to adapt better to the workpiece to be worked.



Art.	Diameter ø	Thickness	Thread	rpm max
PDM115/12M14	115 mm	12 mm	M14	13300
PDM125/12M14	125 mm	12 mm	M14	12200
PDM150/12M14	150 mm	12 mm	M14	10000



PMEX

BACKING PADS WITH FOAM

For velcro discs, to adapt better to the workpiece.



Art.	Diameter ø	Thickness	Thread	rpm max
PME125/18M14	125 mm	18 mm	M14	6800
PME150/12M14	150 mm	12 mm	M14	10000

PPSX

POLYURETHANE BACKING PADS

For velcro discs, soft version.



Art.	Diameter ø	Thickness	Thread	rpm max
PPS125/27M14	125 mm	27 mm	M14	8000
PPS150/29M14	150 mm	29 mm	M14	7000

PDVX-M14

BACKING PAD WITH VENTILATION

For velcro discs, the grooves improve heat dispersion, increasing the life of the abrasive and preventing overheating of the work piece.



Art.	Diameter ø	Thread
PDV115/M14	115 mm	M14
PDV125/M14	125 mm	M14
PDV150/M14	150 mm	M14

0459

HOOK AND LOOP PAD



With 6 holes and 5/16"-24tpi male thread.



Disc diameter	150 mm - 6"
Max speed	12000 rpm

PFLX

BACKING PADS FOR ORBITAL SANDERS

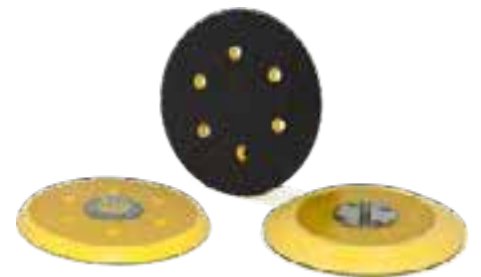

Art.	Diameter ø	Thickness	Shank	Holes	rpm max
PFL125/10F8	125 mm	10 mm	5/16" mm	8	12000
PFL150/10	150 mm	10 mm	5/16" mm	-	10000
PFL150/10F6	150 mm	10 mm	5/16" mm	6	10000

TEV120

BLOCK FOR VELCRO DISCS

Ergonomic shape, quick change of the abrasive sheet.



Size	70 x 120 mm
------	-------------

TDV

BLOCK FOR VELCRO DISCS


Allows you to use velcro discs by hand.



Size	150 mm
------	--------

RASX
ANTI WASTE ROLLS


Extra flexible double resin canvas. Specific for turning, molds, weapons and for all processes that require a highly flexible and long-lasting canvas



Art.	Dimensions	Grit
RAS40	50 mm x 25 m	40
RAS60	50 mm x 25 m	60
RAS80	50 mm x 25 m	80
RAS120	50 mm x 25 m	120
RAS180	50 mm x 25 m	180
RAS220	50 mm x 25 m	220
RAS320	50 mm x 25 m	320
RAS400	50 mm x 25 m	400

RSSX
ANTI-WASTE SPONGE ROLLS


Corundum self-lubricating [C weight] paper coupled with sponge.

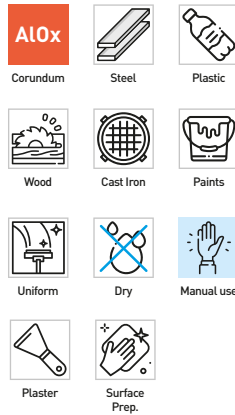

Art.	Dimensions	Grit
RSS150	115 mm x 25 m	150
RSS180	115 mm x 25 m	180
RSS240	115 mm x 25 m	240
RSS320	115 mm x 25 m	320
RSS400	115 mm x 25 m	400
RSS500	115 mm x 25 m	500
RSS600	115 mm x 25 m	600
RSS800	115 mm x 25 m	800
RSS1000	115 mm x 25 m	1000

RSRX
VELCRO PAPER ROLLS


Antistatic corundum paper, semi-open coating, E weight. Dry use, suitable for working wood, leather, Plaster and metal.

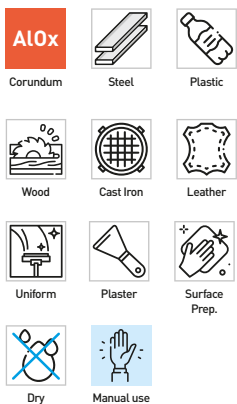

Art.	Dimensions	Grit
RSR115/050/040	115 x 25 m	40
RSR115/050/060	115 x 25 m	60
RSR115/050/080	115 x 25 m	80
RSR115/050/120	115 x 25 m	120

RSAX
LUBRICANT VELCRO PAPER ROLLS

Corundum stearate on light paper [C weight], semi-open coating, dry use.

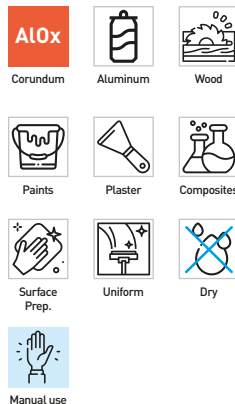


Art.	Dimensions	Grit
RSA115/25/080	115 mm x 25 m	80
RSA115/25/120	115 mm x 25 m	120
RSA115/25/150	115 mm x 25 m	150
RSA115/25/180	115 mm x 25 m	180
RSA115/25/220	115 mm x 25 m	220
RSA115/25/320	115 mm x 25 m	320



FTRX

FLEXIBLE CLOTH

Flexible canvas with cotton backing.

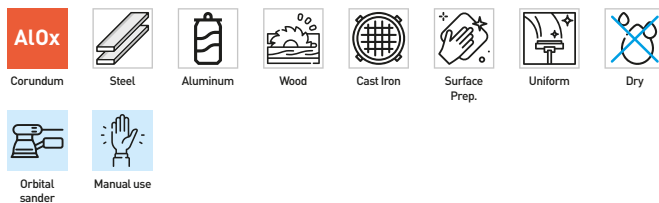


Art.	Dimensions	Grit	Pack
FTR230/040	230 x 280 mm	40	50
FTR230/060	230 x 280 mm	60	50
FTR230/080	230 x 280 mm	80	50
FTR230/120	230 x 280 mm	120	50
FTR230/180	230 x 280 mm	180	50
FTR230/220	230 x 280 mm	220	50
FTR230/320	230 x 280 mm	320	50
FTR230/400	230 x 280 mm	400	50
FTR230/600	230 x 280 mm	600	50

RTFX

RESIN CLOTH ROLLS

Very flexible and resistant. Suitable for working both flat and shaped surfaces.

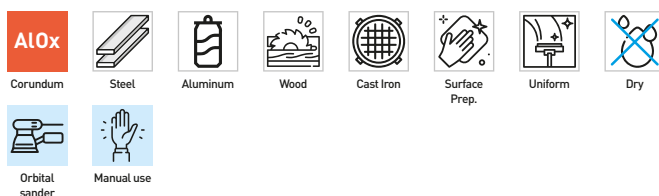

Art.	Dimensions	Grit	Pack
RTF120/005/060	115 mm x 5 m	60	10
RTF120/005/080	115 mm x 5 m	80	10
RTF120/005/100	115 mm x 5 m	100	10
RTF120/005/120	115 mm x 5 m	120	10
RTF120/050/040	115 mm x 50 m	40	10
RTF120/050/060	115 mm x 50 m	60	10
RTF120/050/080	115 mm x 50 m	80	10
RTF120/050/100	115 mm x 50 m	100	10
RTF120/050/120	115 mm x 50 m	120	10

CARX

NEW

RECTANGULAR ABRASIVE PAPER



Art.	Dimensions	Holes	Grit	Pack
CAR115280/060	280 x 115 mm	14	60	10
CAR115280/080	280 x 115 mm	14	80	10
CAR115280/120	280 x 115 mm	14	120	10

RCLX

LATEX WATERPROOF ROLLS


For wet and dry sanding, usually used in polishing and sanding metal moulds, carbon fiber workpieces, fiber glass, composite materials, and precision instruments.



Art.	Dimensions	Grit
RCL115/100/120	115 mm x 100 m	120
RCL115/100/150	115 mm x 100 m	150
RCL115/100/180	115 mm x 100 m	180

RCSX
STEARATE ROLLS


Stearate rolls, prevent clogging and static, flexible and high wear resistant, ideal for paint sanding. The addition of zinc stearate prevents clogging.

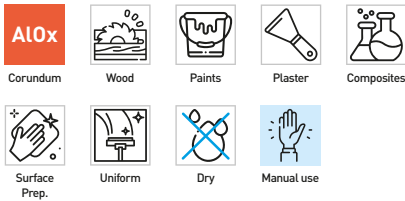

Art.	Dimensions	Grit
RCS115/050/150	115 mm x 50 m	150
RCS115/050/180	115 mm x 50 m	180
RCS115/050/240	115 mm x 50 m	240
RCS115/050/320	115 mm x 50 m	320
RCS115/050/400	115 mm x 50 m	400
RCS115/050/600	115 mm x 50 m	600

FLIX
LATEX WATERPROOF SHEETS


Wet and dry sanding, usually used in polishing and sanding paints, precision instrument, metal, composite materials, automobile production and repair, electron.

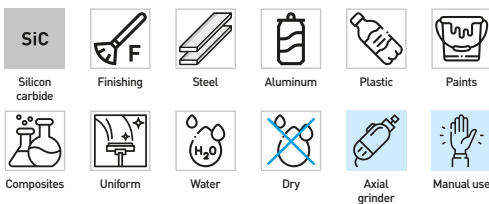

Art.	Dimensions	Grit	Pack
FLI230/240	230 x 280 mm	240	100
FLI230/320	230 x 280 mm	320	100
FLI230/400	230 x 280 mm	400	100
FLI230/600	230 x 280 mm	600	100
FLI230/800	230 x 280 mm	800	100
FLI230/1000	230 x 280 mm	1000	100
FLI230/1200	230 x 280 mm	1200	100

SPIXZ
REINFORCED ABRASIVE SPIRABANDS

Created with strips of abrasive cloth, wrapped and glued on a cotton support, ideal for grinding aluminum or steel. To be used with the relative rubber sleeve holders. To reach parts that are difficult to access or to maintain the radii.



Art.	Dimensions	Grit	rpm max	Pack
SPI1020/040Z	10 x 20 mm	40	36000	100
SPI1020/060Z	10 x 20 mm	60	36000	100
SPI1020/080Z	10 x 20 mm	80	36000	100
SPI1020/120Z	10 x 20 mm	120	36000	100
SPI1530/040Z	15 x 30 mm	40	26000	100
SPI1530/060Z	15 x 30 mm	60	26000	100
SPI1530/080Z	15 x 30 mm	80	26000	100
SPI1530/120Z	15 x 30 mm	120	26000	100
SPI2030/040Z	20 x 30 mm	40	18000	100
SPI2030/060Z	20 x 30 mm	60	18000	100
SPI2030/080Z	20 x 30 mm	80	18000	100
SPI2030/120Z	20 x 30 mm	120	18000	100
SPI2220/040Z	22 x 20 mm	40	17000	100
SPI2220/060Z	22 x 20 mm	60	17000	100
SPI2220/080Z	22 x 20 mm	80	17000	100
SPI2220/120Z	22 x 20 mm	120	17000	100
SPI2525/040Z	25 x 25 mm	40	15000	100
SPI2525/060Z	25 x 25 mm	60	15000	100
SPI2525/080Z	25 x 25 mm	80	15000	100
SPI2525/120Z	25 x 25 mm	120	15000	100
SPI3030/040Z	30 x 30 mm	40	13000	100
SPI3030/060Z	30 x 30 mm	60	13000	100
SPI3030/080Z	30 x 30 mm	80	13000	100
SPI3030/120Z	30 x 30 mm	120	13000	100
SPI4530/040Z	45 x 30 mm	40	8500	100
SPI4530/060Z	45 x 30 mm	60	8500	100
SPI4530/080Z	45 x 30 mm	80	8500	100
SPI4530/120Z	45 x 30 mm	120	8500	100

SGCX
RUBBER HOLDERS

Expansion rubber holders, used to fix spirabands.



Axial grinder



Art.	Dimensions	Shank	rpm max
SGC1020	10 x 20 mm	6 mm	36000
SGC1530	15 x 30 mm	6 mm	26000
SGC2030	20 x 30 mm	6 mm	18000
SGC2220	22 x 20 mm	6 mm	17000
SGC2525	25 x 25 mm	6 mm	15000
SGC3030	30 x 30 mm	6 mm	13300
SGC4530	45 x 30 mm	6 mm	8500

CRDXT
CARTRIDGE ROLLS

Small size tools, for grinding operations of points difficult to reach. Can also work at peak. The rolled-up construction gives the tool a longer service life than normal cylindrical spiral bands. Universal use on steel, non-ferrous metals and plastic.



Art.	Dimensions	Grit	Shape	Pack
CRD1038/060T	10 x 38 mm	60	Conical	50
CRD1038/080T	10 x 38 mm	80	Conical	50
CRD1038/120T	10 x 38 mm	120	Conical	50
CRD1238/060T	12 x 38 mm	60	Conical	50
CRD1238/080T	12 x 38 mm	80	Conical	50
CRD1238/120T	12 x 38 mm	120	Conical	50

CRDXC
CARTRIDGE ROLLS

Small size tools, for grinding operations of points difficult to reach. Can also work at peak. The rolled-up construction gives the tool a longer service life than normal cylindrical spiral bands. Universal use on steel, non-ferrous metals and plastic.



Art.	Dimensions	Grit	Shape	Pack
CRD0638/060C	6 x 38 mm	60	Cylindrical	50
CRD0638/080C	6 x 38 mm	80	Cylindrical	50
CRD0638/120C	6 x 38 mm	120	Cylindrical	50
CRD1038/040C	10 x 38 mm	40	Cylindrical	50
CRD1038/060C	10 x 38 mm	60	Cylindrical	50
CRD1038/080C	10 x 38 mm	80	Cylindrical	50
CRD1038/120C	10 x 38 mm	120	Cylindrical	50

PCR6338
PIN FOR CARTRIDGE ROLLS


Axial grinder



NTXA
ABRASIVE BELTS

NTXZ
ABRASIVE BELTS


Art.	Dimensions	Grit	Pack
NT0440/035/040A	440 x 35 mm	40	10
NT0440/035/060A	440 x 35 mm	60	10
NT0440/035/080A	440 x 35 mm	80	10
NT0440/035/120A	440 x 35 mm	120	10
NT0533/075/040A	533 x 75 mm	40	10
NT0533/075/060A	533 x 75 mm	60	10
NT0533/075/080A	533 x 75 mm	80	10
NT0533/075/120A	533 x 75 mm	120	10
NT0686/050/040A	686 x 50 mm	40	10
NT0686/050/060A	686 x 50 mm	60	10
NT0686/050/080A	686 x 50 mm	80	10
NT0686/050/100A	686 x 50 mm	100	10
NT0686/050/120A	686 x 50 mm	120	10
NT0914/100/040A	914 x 100 mm	40	10
NT0914/100/060A	914 x 100 mm	60	10
NT0914/100/080A	914 x 100 mm	80	10
NT0914/100/100A	914 x 100 mm	100	10
NT0914/100/120A	914 x 100 mm	120	10
NT1000/100/040A	1000 x 100 mm	40	10
NT1000/100/060A	1000 x 100 mm	60	10
NT1000/100/080A	1000 x 100 mm	80	10
NT1000/100/120A	1000 x 100 mm	120	10
NT1075/025/040A	1075 x 25 mm	40	10
NT1075/025/060A	1075 x 25 mm	60	10
NT1075/025/080A	1075 x 25 mm	80	10
NT1075/025/100A	1075 x 25 mm	100	10
NT1075/025/120A	1075 x 25 mm	120	10
NT1219/152/040A	1219 x 152 mm	40	10
NT1219/152/060A	1219 x 152 mm	60	10
NT1219/152/080A	1219 x 152 mm	80	10
NT1219/152/100A	1219 x 152 mm	100	10
NT1219/152/120A	1219 x 152 mm	120	10
NT1500/120/040A	1500 x 120 mm	40	10
NT1500/120/060A	1500 x 120 mm	60	10
NT1500/120/080A	1500 x 120 mm	80	10
NT1500/120/120A	1500 x 120 mm	120	10
NT1750/150/040A	1750 x 150 mm	40	10
NT1750/150/060A	1750 x 150 mm	60	10
NT1750/150/080A	1750 x 150 mm	80	10
NT1750/150/120A	1750 x 150 mm	120	10

Art.	Dimensions	Grit	Pack
NT0330/010/040Z	330 x 10 mm	40	10
NT0330/010/060Z	330 x 10 mm	60	10
NT0330/010/080Z	330 x 10 mm	80	10
NT0330/010/120Z	330 x 10 mm	120	10
NT520/020/040Z	520 x 20 mm	40	10
NT520/020/060Z	520 x 20 mm	60	10
NT520/020/080Z	520 x 20 mm	80	10
NT520/020/120Z	520 x 20 mm	120	10
NT0610/100/040Z	610 x 100 mm	40	10
NT0610/100/060Z	610 x 100 mm	60	10
NT0610/100/080Z	610 x 100 mm	80	10
NT0610/100/120Z	610 x 100 mm	120	10
NT0760/040/040Z	760 x 40 mm	40	10
NT0760/040/060Z	760 x 40 mm	60	10
NT0760/040/080Z	760 x 40 mm	80	10
NT0760/040/120Z	760 x 40 mm	120	10
NT0914/100/040Z	914 x 100 mm	40	10
NT0914/100/060Z	914 x 100 mm	60	10
NT0914/100/080Z	914 x 100 mm	80	10
NT0914/100/120Z	914 x 100 mm	120	10
NT1000/100/040Z	1000 x 100 mm	40	10
NT1000/100/060Z	1000 x 100 mm	60	10
NT1000/100/080Z	1000 x 100 mm	80	10
NT1000/100/120Z	1000 x 100 mm	120	10
NT1219/152/040Z	1219 x 152 mm	40	10
NT1219/152/060Z	1219 x 152 mm	60	10
NT1219/152/080Z	1219 x 152 mm	80	10
NT1219/152/120Z	1219 x 152 mm	120	10
NT1500/120/040Z	1500 x 120 mm	40	10
NT1500/120/060Z	1500 x 120 mm	60	10
NT1500/120/080Z	1500 x 120 mm	80	10
NT1500/120/120Z	1500 x 120 mm	120	10
NT1750/150/040Z	1750 x 150 mm	40	10
NT1750/150/060Z	1750 x 150 mm	60	10
NT1750/150/080Z	1750 x 150 mm	80	10
NT1750/150/120Z	1750 x 150 mm	120	10
NT2000/050/040Z	2000 x 50 mm	40	10
NT2000/050/060Z	2000 x 50 mm	60	10
NT2000/050/080Z	2000 x 50 mm	80	10
NT2000/050/120Z	2000 x 50 mm	120	10
NT2000/150/040Z	2000 x 150 mm	40	10
NT2000/150/060Z	2000 x 150 mm	60	10
NT2000/150/080Z	2000 x 150 mm	80	10
NT2000/150/120Z	2000 x 150 mm	120	10




SURFACE CONDITIONING

SCDX

SURFACE CONDITIONING FLAP DISCS

Fast and steady finish without clogging, cooler cut. increased lifetime compared to standard surface conditioning discs

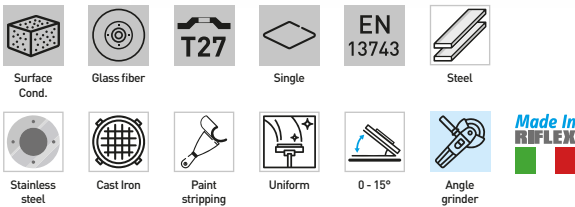

Art.	Dimensions	Grit	rpm max	Pack
SCD115/C	Ø 115 x 22 mm	Coarse	13300	10
SCD115/M	Ø 115 x 22 mm	Medium	13300	10
SCD115/VF	Ø 115 x 22 mm	Very Fine	13300	10
SCD125/C	Ø 125 x 22 mm	Coarse	12200	10
SCD125/M	Ø 125 x 22 mm	Medium	12200	10
SCD125/VF	Ø 125 x 22 mm	Very Fine	12200	10

SPA115/M14

BACKING PAD

For surface conditioning discs.




Diameter Ø	115 mm
Thread	M14
rpm max	13300

VSCX

SURFACE CONDITIONING DISCS

Surface preparation for painting, to repair defects with an uniform satin finish. Removes oxidation, scratches, varnishes, welding marks.




Art.	Diameter Ø	Grit	rpm max	Pack
VSC115/080C	115 mm	Coarse (80)	5100	10
VSC115/120M	115 mm	Medium (120)	5100	10
VSC115/240VF	115 mm	Very Fine (240)	5100	10

MSCX

FAST LOCK SURFACE CONDITIONING

Removes oxidation, scratches, varnishes, welding marks.



Art.	Diameter Ø	Grit	rpm max	Pack
MSC050/C	50 mm	Coarse	25000	10
MSC050/M	50 mm	Medium	25000	10
MSC050/VF	50 mm	Very Fine	25000	10
MSC075/C	75 mm	Coarse	20000	25
MSC075/M	75 mm	Medium	20000	25
MSC075/VF	75 mm	Very Fine	20000	25

PARX
NON WOVEN ROLLS

Non-woven synthetic fiber compounds, combined with abrasive grain particles via resin. Resistant to water and lubricants, suitable for satin finishing, sanding, removing paint residues or scratches, used in different sectors: metal, wood, paints, plastics, ceramics.


FPA120-
NON WOVEN SHEETS

Non-woven synthetic fiber compounds, combined with abrasive grain particles via resin. Resistant to water and lubricants, suitable for satin finishing, sanding, removing paint residues or scratches, used in different sectors: metal, wood, paints, plastics, ceramics.



Art.	Dimensions	Grit
PAR115/120AM	115 mm x 10 m	A.Medium (120)
PAR115/180AF	115 mm x 10 m	A.Fine (180)
PAR115/320AVF	115 mm x 10 m	A.Very Fine (320)
PAR115/600AUF	115 mm x 10 m	A.Ultra Fine (600)



Art.	Dimensions	Grit	Pack
FPA120/M	115 x 280 mm	A.Medium (120)	10
FPA120/F	115 x 280 mm	A.Fine (180)	10
FPA120/VF	115 x 280 mm	A.Very Fine (320)	10
FPA120/UF	115 x 280 mm	S.Ultra Fine (600)	10





PAS-

GRINDING PASTES

Pink: medium/fatty paste for polishing and shining; accompanies cloth in the second pass and in polishing brass, silver, aluminum, chrome and zamak.
 Green: medium-fat paste to accompany sisal in finishing stainless.
 White: greasy paste to accompany roughing and first pass with sisal, buffer, steel wire or nylon thread. For brass, silver, zamak, stainless steel.
 Yellow: very sharp for removing scratches from precious and silverware.




Finishing

Art.	Color
PAS/W	White
PAS/P	Pink
PAS/Y	Yellow
PAS/G	Green

DLFX

FELT FLAP DISCS

Suited for mirror polishing, to be used with compounds or abrasive pastes. Felt flaps are flexible and prevent overheating.




Art.	Dimensions	rpm max	Pack
DLF115	Ø 115 x 22 mm	6000	10
DLF125	Ø 125 x 22 mm	6000	10

S169

POLISHING KIT


Green and pink: paste for finishing polishes on the main categories of metals. Brown and Black: for performing coarse / medium finish polishes on materials such as brass, aluminum and zinc. White: for carrying out coarse / medium finish polishing on materials such as iron, stainless steel and copper.



MDFX

FAST LOCK FELTRO

Suited for mirror polishing, to be used with compounds or abrasive pastes.

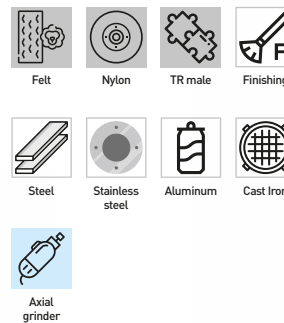


Art.	Diameter Ø	rpm max	Pack
MDF050	50 mm	25000	10
MDF075	75 mm	20000	10

RGFX

FELT FLAP WHEELS

Suited for mirror polishing, to be used with compounds or abrasive pastes. Felt flaps are flexible and prevent overheating of normal felt wheels.




Art.	Diameter Ø	Thickness	Shank	rpm max	Pack
RGF030/30	30 mm	30 mm	6 mm	12500	10
RGF040/30	40 mm	30 mm	6 mm	9500	10
RGF050/30	50 mm	30 mm	6 mm	7500	10
RGF060/30	60 mm	30 mm	6 mm	6000	10
RGF080/30	80 mm	30 mm	6 mm	4500	10

DFFX

FELT DISCS

Suited for polishing. To be used with compound or diamond paste. best peripheral speed 5-10 m/s.




Art.	Diameter ø	Thickness	Hole
DFF100/13	100 mm	13 mm	10 mm
DFF150/13	150 mm	13 mm	15 mm
DFF150/25	150 mm	25 mm	15 mm
DFF200/13	200 mm	13 mm	15 mm
DFF200/25	200 mm	25 mm	15 mm

VDFX

VELCRO FELT DISCS

Suited for polishing. To be used with compound or diamond paste.




Art.	Diameter ø	Thickness	rpm max	Pack
VDF075	75 mm	5 mm	6000	10
VDF115	115 mm	5 mm	4000	10
VDF125	125 mm	5 mm	3500	10
VDF150	150 mm	5 mm	3000	10
VDF180	180 mm	5 mm	2500	10

MFGX

FELT POINT

Suited for polishing cut off forms. To be used with diamond paste. Best peripheral speed 5-10 m/s.




Art.	Shape	Diameter ø	Thickness	Shank	Pack
MFG0610/03A	A	6 mm	10 mm	3 mm	10
MFG0810/03A	A	8 mm	10 mm	3 mm	10
MFG1014/06A	A	10 mm	14 mm	6 mm	10
MFG1520/06A	A	15 mm	20 mm	6 mm	10
MFG0812/03K	K	8 mm	12 mm	3 mm	10
MFG1018/06K	K	10 mm	18 mm	6 mm	10
MFG1530/06K	K	15 mm	30 mm	6 mm	10
MFG1530/06C	C	15 mm	30 mm	6 mm	10
MFG2025/06C	C	20 mm	25 mm	6 mm	10
MFG2530/06C	C	25 mm	30 mm	6 mm	10
MFG2025/06L	L	20 mm	25 mm	6 mm	10
MFG2530/06L	L	25 mm	30 mm	6 mm	10



DFC115/M14

CONICAL FELT DISC


Suited for polishing. to be used with compound or diamond paste.



Diameter ø	115 mm
Thickness	12 mm
Thread	M14
rpm max	12500

RFF100

VENTILATED FELT WHEEL




Dimensions	110 x 100 mm
Hole diameter	19 mm



DCK100

VENTILATED COTTON DISCS

Mirror polishing. 10 discs to get a 100 mm wheel.



Diameter ø	100 mm
Hole	19,1 mm
Pack	10

DSK100

SISAL/COTTON DISCS

Suited for inox to eliminate abrasive merks and before polishing operations with felt or cotton. 7 discs to get a 100 mm wheel.




Diameter ø	100 mm
Hole	19,1 mm
Pack	10

DCTX

STITCHED COTTON DISCS

Layers of cotton bonded together by concentric stitching. Suited for polishing, to be used with pastes.



Art.	Diameter ø	Hole
DCT150	150 mm	12 mm
DCT200	200 mm	20 mm
DCT250	250 mm	20 mm

DSCX

SISAL & COTTON DISCS

Suited for stainless steel to eliminate abrasive marks and before polishing operations with felt or cotton. To be used with pastes.




Art.	Diameter ø	Hole
DSC150	150 mm	20 mm
DSC200	200 mm	20 mm
DSC250	250 mm	20 mm

DSTX

SISAL STITCHED DISCS

Suited for stainless steel to eliminate abrasive marks and before polishing operations with felt or cotton. To be used with pastes.





Art.	Diameter ø	Hole
DST150	150 mm	20 mm
DST200	200 mm	20 mm
DST250	250 mm	20 mm

DCVX

VENTILATED DISCS


Ventilated cotton discs.



Art.	Diameter ø	Hole	Layers
DCV150	150 mm	20 mm	8
DCV200	200 mm	20 mm	16

DMV150
VENTILATED DISCS


Ventilated sisal and cotton discs.




Diameter ϕ	150 mm
Hole	20 mm
Layers	2

DC200
CORRUGATED DISCS

Made of cotton with cardboard core.




Diameter ϕ	200 mm
Hole	20 mm
Layers	14

DNW100
WHITE NON WOVEN POLISHING DISCS



Diameter ϕ	100 mm
Hole	10 mm
Pack	10

DCGX
SHAFT MOUNTED COTTON BUFFINGS

Suited for polishing. To be used with pastes. Best peripheral speed 5-10 m/s.




Art.	Diameter ϕ	Thickness	Shank	Pack
DCG050	50 mm	12 mm	6 mm	10
DCG080	80 mm	12 mm	6 mm	10
DCG100	100 mm	12 mm	6 mm	10

FCGX
FLARE BUFFS


Art.	Diameter ϕ	Shank	Pack
FCG50	50 mm	6 mm	10
FCG75	75 mm	6 mm	10

CCGX
DOME MOPS

For polishing, for use with abrasive paste. Optimal peripheral speed 5-10 m/s.



Art.	Diameter ϕ	Shank	Pack
CCG50	50 mm	6 mm	5
CCG75	75 mm	6 mm	5



PNS

SHAFT

Shaft for ventilated disc DNW.




Axial grinder



PLV175

BACKING PAD FOR LAMBS WOOL DISCS

Backing pad suited for VLA200.



M14

Orbital sander




Diameter ø	175 mm
Thread	M14

VSPX

POLYURETHANE BACKING PADS

High & middle profile soft backing pads for contour polishing. Pur molded, soft, good rebounding and durability. Ideal for contour face polishing, e.g. car body, fiberglass piece, boat, floor etc. , suggested to work with lambswool pads, foam pads and abrasive discs.



M14

Orbital sander




Art.	Diameter ø	Thread	rpm max
VSP075	75 mm	M14	12200
VSP115	115 mm	M14	10000
VSP125	125 mm	M14	10000
VSP150	150 mm	M14	7000
VSP180	180 mm	M14	5000

VLA200

TWISTED LAMBS WOOL DISC

Polishing of painted surfaces and marble.



Diameter ø	200 mm
------------	--------

VDLX

POLISHING LAMB'S WOOL

Merinos lamb wool. ideal for polishing all painted surfaces with velcro back



Art.	Diameter ø
VDL075	75 mm
VDL115	115 mm
VDL125	125 mm
VDL150	150 mm
VDL180	180 mm



BSAX
FOAM BLOCK

Thick foam, abrasive on four sides. Wood preparation, doors and windows, angles, de-nibbing. Dry and wet sanding, can be washed and reused.



Art.	Dimensions	Grit	Pack
BSA100/060C	98 x 69 x 26 mm	Coarse (60)	20
BSA100/100M	98 x 69 x 26 mm	Medium (100)	20
BSA100/180F	98 x 69 x 26 mm	Fine (180)	20

FSAX
FOAM PAD

Very flexible, abrasive on both sides. Dry and wet sanding, can be washed and reused. Furniture industry, auto body repair, wood preparation.



Art.	Dimensions	Grit	Pack
FSA120/060C	120 x 98 x 13 mm	Coarse (60)	20
FSA120/100M	120 x 98 x 13 mm	Medium (100)	20
FSA120/180F	120 x 98 x 13 mm	Fine (180)	20

BGAX
ABRASIVE RUBBER BLOCKS


Can be used for various cleaning and manual finishing operations



Art.	Dimensions	Grit
BGA8050/036	80 x 50 x 20 mm	36
BGA8050/060	80 x 50 x 20 mm	60
BGA8050/120	80 x 50 x 20 mm	120
BGA8050/240	80 x 50 x 20 mm	240

SALX
POLISHING SPONGES

Available in different flexibility and porosity, ideal for polishing with polishing pastes. Yellow: first polishing, high cut. Blue: first polishing fast cut. Orange: polishing, medium cut. Black: final polishing.



Art.	Diameter ø	Thickness	Color	rpm max
SAL80Y	80 mm	25 mm	Yellow	8000
SAL80B	80 mm	25 mm	Blue	8000
SAL80O	80 mm	25 mm	Orange	8000
SAL80K	80 mm	25 mm	Black	8000
SAL150Y	150 mm	50 mm	Yellow	4500
SAL150B	150 mm	50 mm	Blue	4500
SAL150O	150 mm	50 mm	Orange	4500
SAL150K	150 mm	50 mm	Black	4500