



PRESSES




Capacity (Ton)

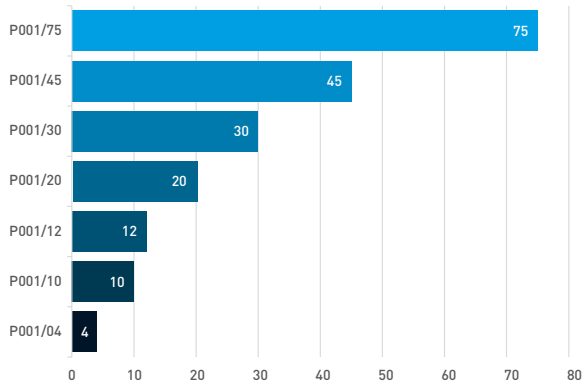

Ram stroke (mm)

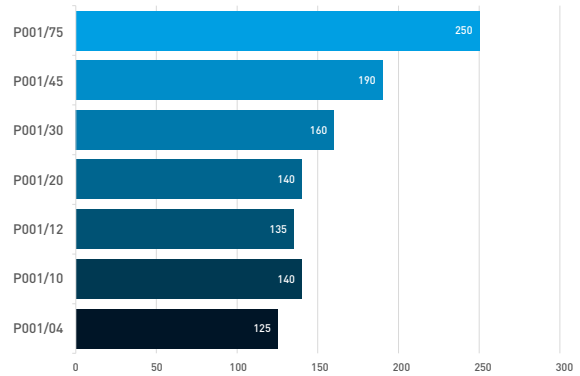

Working area

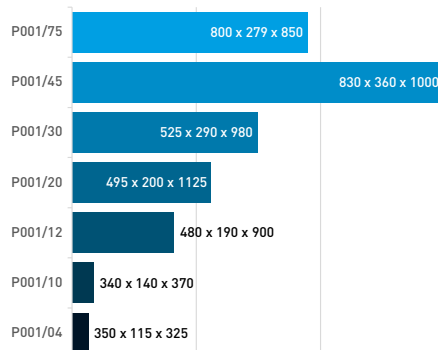

P001/75

PNEUMATIC HYDRAULIC SHOP PRESS

Equipped with wheeled mobile piston, with winch for bench movement, two-speed manual control and pneumatic servopump with foot control



Capacity	75000 kg
Working area	800 x 279 x 850 h mm
Ram Ø	125 mm
Ram Ø	78 mm
Ram stroke	250 mm
Working pressure	0,75 ÷ 0,85 MPa
Dimensions	1140 x 800 x 1896 h mm
Net weight	460 kg



P001/45

HYDRAULIC SHOP PRESS WITH MANUAL PNEUMATIC CONTROL

With manual winch for bench handling, equipped with manual control and pneumatic servo pump with hand control.



Capacity	45000 kg
Working area	830 x 360 x 1000 h mm
Cylinder Ø	90 mm
Ram Ø	58 mm
Ram stroke	190 mm
Working pressure	7÷ 8 Bar
Max. pressure	63,5 MPa
Dimensions	1400 x 800 x 1700 h mm
Net weight	330 kg



P001/30

HYDRAULIC SHOP PRESS

With two speed pump and movable piston.



Capacity	30000 kg
Working area	525 x 290 x 980h mm
Cylinder Ø	92 mm
Ram Ø	56 mm
Ram stroke	160 mm
Max. pressure	69 MPa
Dimensions	875 x 700 x 1780 h mm
Net weight	145 kg



P001/20
HYDRAULIC SHOP PRESS

With moveable piston.



Capacity	20000 kg
Working area	495 x 200 x 1125 h mm
Cylinder Ø	75 mm
Ram Ø	48 mm
Ram stroke	140 mm
Max. pressure	69.3 MPa
Dimensions	690 x 600 x 1830 h mm
Net weight	94 kg


P001/12
HYDRAULIC SHOP PRESS

With movable piston.



Capacity	12000 kg
Working area	480 x 190 x 900 h mm
Cylinder Ø	56 mm
Ram Ø	38 mm
Ram stroke	135 mm
Max. pressure	69 MPa
Dimensions	730 x 550 x 1600 h mm
Net weight	60 kg


P001/10
HYDRAULIC SHOP PRESS

With bench and movable piston.



Capacity	10000 kg
Working area	340 x 140 x 370 h mm
Cylinder Ø	56 mm
Ram Ø	38 mm
Ram stroke	130 mm
Max. pressure	69 MPa
Dimensions	565 x 500 x 1040 h mm
Net weight	52 kg


P001/04
HYDRAULIC SHOP PRESS

Counter top, 4 ton, for bearings.



Capacity	4000 kg
Working area	350 x 115 x 325 h mm
Cylinder Ø	40 mm
Ram Ø	25 mm
Ram stroke	125 mm
Max. pressure	51 MPa
Dimensions	450 x 400 x 655 h mm
Net weight	30 kg



P022-

RATCHET ARBOR PRESS

With removeable revolving table.



Art.	Capacity	Max height piece	Max Ø piece	Arbor size	Net weight
P022/05	5000 N	90 mm	160 mm	19 x 19 mm	8 kg
P022/10	10000 N	100 mm	180 mm	25 x 25 mm	12 kg
P022/20	20000 N	170 mm	260 mm	30 x 30 mm	27 kg

P029-

RATCHET ARBOR PRESS

With removeable revolving table.



Art.	Capacity	Dimensions	Max height piece	Max ø piece	Arbor size	Net weight
P029/2	15000 N	390 x 160 x 720h mm	190 mm	180 mm	30 x 30 mm foro 10 mm	42 kg
P029/3	25000 N	450 x 200 x 870h mm	290 mm	250 mm	37,5 x 37,5 mm foro 13.80 mm	60 kg

P028-

HAND PUNCH

With spring loaded return.



Art.	Capacity	Dimensions	Max height piece	Max ø piece	Spindle travel	Net weight
P028/07	1500 N	240 x 155 x 335h mm	230 mm	150 mm	50 mm	8,5 kg
P028/14	2000 N	280 x 170 x 760h mm	275 mm	180 mm	70 mm	18 kg

0485

SHOP PRESS PIN SET



8 Pcs

Pins head size	24,7 mm
----------------	---------

0054/10
HYDRAULIC BODY FRAME REPAIR KIT


Capacity	10 ton
Ram length	330 mm
Ram stroke	130 mm
Net weight	30 kg

0054/4
HYDRAULIC BODY FRAME REPAIR KIT


Capacity	4 ton
Ram length	270 mm
Ram stroke	120 mm
Net weight	19 kg

0664
HYDRAULIC PUMP WITH PNEUMATIC PEDAL CONTROL

Useful for shop press, trolley jacks and rams.



Rated pressure	70 MPa
Working pressure	7 ÷ 8 bar
Usable oil capacity	690 ml
Air consumption	10 SCFM
Net weight	8 kg

0271
HYDRAULIC PUMP

With pump activation pedal.



Rated pressure	63,7 MPa
Usable oil capacity	790 ml
Hose length	1500 mm
Net weight	7 kg

0663
PULL BACK RAM


Capacity	5 ton
Length Closed	560 mm
Length Open	690 mm
Spindle	ø 33 mm
Swing	130 mm
Net weight	5,5 kg



0567
LOW PROFILE HYDRAULIC TROLLEY JACK

2 tons, made of steel.



Capacity	2 ton
Lifting	90 ÷ 385 mm
Dimensions	580 x 165 x 235 h mm
Net weight	13 kg

0457
LOW PROFILE JACK

2 tons, made of steel, with round handle.



Capacity	2 ton
Lifting	70 ÷ 500 mm
Dimensions	785 x 350 x 152 mm
Net weight	41 kg

0369
HYDRAULIC TROLLEY JACK

Dual pump, with removeable saddle and rubber pad.



Capacity	3,5 ton
Dimensions	745 x 335 x 180 mm
Lifting	110 ÷ 560 mm
Net weight	46 kg

0375A
LOW PROFILE HYDRAULIC TROLLEY JACK

2,5 ton, double pump quick lift, with load limiter.



Capacity	2.5 ton
Lifting	75 ÷ 500 mm
Dimensions	680 x 345 x 220 h mm
Net weight	32,5 kg

0065A
HYDRAULIC TROLLEY JACK

With removable saddle.



Capacity	3 ton
Dimensions	660 x 345 x 260 mm
Lifting	140 ÷ 515 mm
Net weight	33 kg

C038/30
HYDRAULIC TROLLEY JACK


Capacity	3 ton
Dimensions	572 x 328 x 175h mm
Lifting	130 ÷ 465 mm
Net weight	28 kg





0060

HYDRAULIC TROLLEY JACK

Metal body frame. Handle for hand carrying. Extendable lever.



Capacity	2 ton
Dimensions	535 x 225 x 145 mm
Lifting	135 ÷ 385 mm
Net weight	11 kg

C039/25

HYDRAULIC TROLLEY JACK

Aluminium and steel hydraulic trolley jack with double pump.



Capacity	2.5 ton
Dimensions	659 x 289 x 165 h mm
Lifting	110 ÷ 460 mm
Net weight	27 kg

C039/15

HYDRAULIC TROLLEY JACK

Aluminium and steel hydraulic trolley jack with double pump.



Capacity	1.5 ton
Dimensions	490 x 270 x 130 h mm
Lifting	90 ÷ 358 mm
Net weight	15 kg

0658

HYDRAULIC JACK



Capacity	10 ton
Lifting range of foot	30 ÷ 260 mm
Lifting range of head	420 ÷ 665 mm
Net weight	30 kg

0067

COUPLE JACK STAND

Height adjustable with fixing pin.



Capacity	2 ton
Heights	240 - 270 - 320 - 365 mm
Net weight	3 kg

0069-

COUPLE JACK STAND



Art.	Capacity	Height min - max	Base dimensions	Net weight
0069/3	3 ton	298 ÷ 428 mm	190 x 210 mm	6,5 kg
0069/6	6 ton	400 ÷ 610 mm	260 x 285 mm	13 kg
0069/10	10 ton	468 ÷ 718 mm	290 x 328 mm	29 kg

0021/1
HYDRAULIC FOLDING CRANE

With two pivoting wheels with brakes, cast iron wheels. Lowering system and pumping lever arranged laterally. The ability to fold the legs when not in use allows it to be stored in confined spaces.



Capacity	1000 kg
Dimensions	1555 x 1010 x 1455h mm
Fold dimensions	720 x 490 x 1520h mm
Min/max boom extension	715 ÷ 990 mm
Hook heights with raised arm	1800 mm @ 1000 kg 1970 mm @ 250 kg
Hook heights with lowered arm	160 mm @ 250 kg 400 mm @ 1000 kg
Front opening	890 mm
Net weight	64,5 kg

0063
HYDRAULIC FOLDING CRANE

With two pivoting wheels and rear pad brake, lowering system and pumping lever placed in the rear, cast iron wheels. The ability to fold the legs when not in use allows it to be stored in confined spaces.



Capacity	1000 kg
Dimensions	1800 x 1000 x 1500h mm
Fold dimensions	800 x 860 x 1600h mm
Min/max boom extension	680 ÷ 1220 mm
Hook heights with raised arm	2100 mm @ 1000 kg 2550 mm @ 250 kg
Hook heights with lowered arm	0 mm @ 250 kg 480 mm @ 1000 kg
Front opening	800 mm
Net weight	90 kg

0021/2
HYDRAULIC FOLDING CRANE

With two pivoting wheels with brakes, cast iron wheels. Lowering system and pumping lever arranged laterally. The ability to fold the legs when not in use allows it to be stored in confined spaces.



Capacity	2000 kg
Dimensions	1730 x 1025 x 1400h mm
Fold dimensions	760 x 760 x 1635h mm
Min/max boom extension	750 ÷ 1280 mm
Hook heights with raised arm	1870 mm @ 2000 kg 2280 mm @ 500 kg
Hook heights with lowered arm	0 mm @ 500 kg 430 mm @ 2000 kg
Front opening	910 mm
Net weight	90,5 kg

0094
TRANSMISSION JACK

With load limiter, cross support and tilt support to better align and position gearboxes and differentials.




Capacity	500 kg
Dimensions	1190 x 700 x 660 mm
Min - Max height	1190 ÷ 2000 mm
Net weight	32,5 kg



S033

ENGINE STAND

2 swivel wheels with brake and 2 fixed cast iron wheels, possibility to tilt the engine. Equipped with rotating small parts shelf.




Capacity	600 kg
Dimensions	1200 x 840 x 930 mm
Net weight	27,5 kg
A	720 mm
B	840 mm
C	170 mm

S068

ENGINE STAND

2 swivel wheels with brake and 2 fixed cast iron wheels, possibility to tilt the engine. The ability to fold it when not in use allows it to be stored in confined spaces.

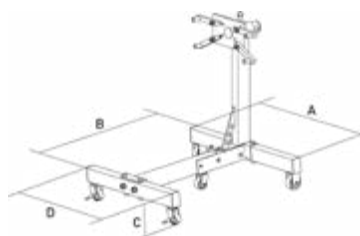

Capacity	680 kg
Dimensions	860 x 830 x 900 mm
Net weight	31 kg
A	820 mm
B	810 mm
C	180 mm
D	680 mm

S019

ENGINE STAND

2 wheels with breaks and 2 fix wheels, possibility to tilt the motor.



Capacity	450 kg	B	810 mm
Dimensions	865 x 810 x 870 mm	C	150 mm
Net weight	21 kg	D	450 mm
A	780 mm		

S024

ENGINE SUPPORT

Engine support holds your engine or transmission in place during heavy automotive repairs, used to support the engine while removing gear box, transmission, replacing clutch and all motor mounts. Rubber feet for safe hold of motor, easy regulation for hold engine in its place in the car. swivel and tilting holders.



Capacity	500 kg
Adjusting height	205 mm
Bed length	730 ÷ 1480 mm
Net weight	13 kg

0147

SHOP CRANE LEVELER

Shop crane and crane leveler, easy to use, just crank to level, tilts forward and backward for easy motor mount alignment



Capacity	680 kg
Width	440 mm
Max stroke of slide	330 mm
Chain	350 mm
Net weight	5 kg

R015

CAR RAMPS SET

Set consisting of two solid ramps to facilitate work under vehicles. These small ramps are suitable for the most common models of small cars and SUVs or even longer vehicles. Made of polypropylene, the wedges are significantly more reliable than steel ramps. In addition, thanks to their non-slip structure, they offer excellent stability. Lightweight and well-shaped, the ramps are easy to transport and space-saving.



Dimensions	905 x 330 x 218 mm
Capacity	2,5 ton
Max tire width	240 mm
Min - Max height	170 mm
Tilting	15°
Net weight	8 kg

0649-
ALUMINUM RAMPS

In aluminum with non-slip floors. Load 170kg.



Art.	Dimensions	Capacity	Max Working angle	Max Working height	Net weight
0649/1500	1520 x 735 mm	170 kg	12,5 % (7°)	180 mm	13,5 kg
0649/1800	1800 x 735 mm	150 kg	12,5 % (7°)	220 mm	16 kg

0594
OIL DRAINER WITHOUT TANK

With wheels, to use under lifts, for waste oil.



Base dimensions	390 x 390 mm
Height max	1700 mm
Net weight	13 kg

0595
OIL DRAINER

With tank and wheels, to use under lifts, for waste oil.



Tank capacity	70 l
Height min - max	1170 ÷ 1860 mm
Maximum tank pressure	0.45 bar
Net weight	23 kg

0596
PNEUMATIC OIL DRAINER

With wheels and different size of suction probes, for waste oil, for use under lifts too.



Tank capacity	70 l
Measuring tank capacity	10 l
Height max	1500 mm
Metal probe	2 x ø6 mm x 695 mm
Nylon probe	2 x ø6 mm x 680 mm 2 x ø8 mm x 700 mm
Suction	ø6 x 4,5 mm - 0,4 ÷ 0,8 l/min ø8 x 6,5 mm - 1 ÷ 1,6 l/min
Rubber hose length	Suction 1500 mm Drain 2050 mm
Power pressure	8 ÷ 10 bar
Maximum tank pressure	0.45 bar
Net weight	25 kg

0630/2720
12V ELECTRIC WINCH - DIRECT CURRENT

Permanent magnet motor, metal frame, strong cable, with anti unwinding device and cable guide. To be used only for horizontal pulling, not suitable for lifting.

Rated line pull	2720 kg
Speed	1,3 - 4,5 m / min
Motor	12 V 1,3 kW 1,8 hp
Gear Reduction ratio	294:1
Cable size	Ø 7,2 mm x 32 m
Drum dimensions	Ø 63 x 228 mm
Overall dimensions	520 x 180 x 175h mm
Net weight	29 kg


0630/2200
12V ELECTRIC WINCH - DIRECT CURRENT

Permanent magnet motor, metal frame, strong cable, with anti unwinding device and cable guide. To be used only for horizontal pulling, not suitable for lifting.

Rated line pull	2000 kg
Speed	1,5 - 3,6 m / min
Motor	12 V 1,0 kW 1,3 hp
Gear reduction ratio	172:1
Cable size	Ø 6,4 mm x 14,5 m
Drum dimensions	Ø 45 x 97 mm
Overall dimensions	364 x 126 x 141h mm
Net weight	13 kg


0630/0900
12V ELECTRIC WINCH - DIRECT CURRENT

Permanent magnet motor, metal frame, hook with pulley for double pull, resistant cable, with anti unwinding device and cable guide. To be used only for horizontal pulling, not suitable for lifting.

Rated line pull	450 / 900 kg
Speed	1,3 - 3,2 m / min
Motor	12 V 0,7 kW 0,9 hp
Gear reduction ratio	153:1
Cable size	Ø 4 mm x 15 m
Drum dimensions	Ø 31,5 x 73 mm
Overall dimensions	285 x 105 x 105h mm
Net weight	6.7 kg



S029
ELECTRO-HYDRAULIC MOTORCYCLE LIFT TABLE



Max lifting capacity	600 kg
Platform dimensions	2200 x 750 mm
Total length	2995 mm
Service hole dimensions	550 x 340 mm
Min - Max height	260 - 520 - 625 - 710 - 780 - 840 mm
Vice	330 x 320 mm
Vice opening	40 ÷ 180 mm
Motor	230 V 50 Hz 550 W
Net weight	225 kg

S029P
ELECTRO-HYDRAULIC MOTORCYCLE LIFT TABLE



With pump and separate control system that give the possibility to position it at floor level.



Max lifting capacity	600 kg
Platform dimensions	2200 x 750 mm
Total length	2995 mm
Service hole dimensions	550 x 340 mm
Min - Max height	215 - 520 - 625 - 710 - 780 - 840 mm
Vice	330 x 320 mm
Vice opening	40 ÷ 180 mm
Motor	230 V 50 Hz 550 W
Net weight	240 kg

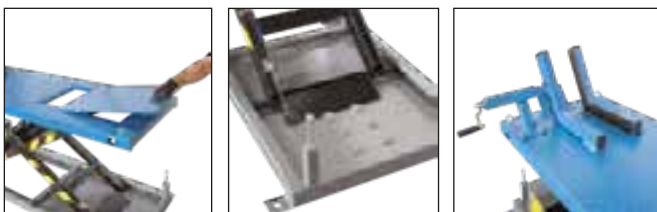S027
ELECTRO-HYDRAULIC MOTORCYCLE LIFT TABLE


Max lifting capacity	600 kg
Platform dimensions	1800 x 600 mm
Total length	2600 mm
Service hole dimensions	550 x 340 mm
Min - Max height	260 ÷ 880 mm
Vice	330 x 320 mm
Vice opening	40 ÷ 200 mm
Motor	230 V 50 Hz 550 W
Net weight	150 kg

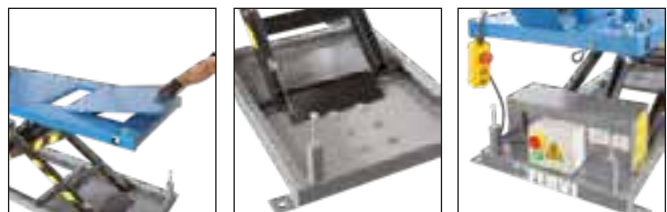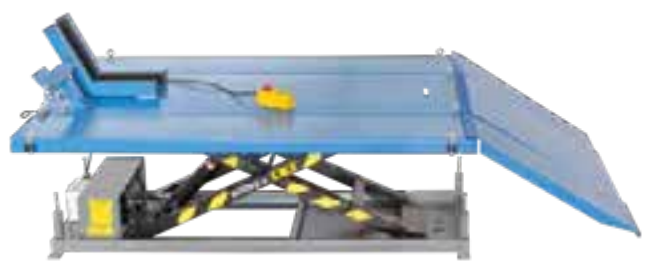S027ATV
ELECTRO-HYDRAULIC ATV & MOTORCYCLE LIFT TABLE


Max lifting capacity	600 kg
Platform dimensions	1800 x 1200 mm
Total length	2600 mm
Service hole dimensions	550 x 340 mm
Min - Max height	260 ÷ 880 mm
Vice	330 x 320 mm
Vice opening	40 ÷ 200 mm
Motor	230 V 50 Hz 550 W
Net weight	235 kg



S008/M

HYDRAULIC MOTORCYCLE LIFT TABLE

With foot pump.



Max lifting capacity	400 kg
Platform dimensions	1825 x 660 mm
Total length	2500 mm
Min - Max height	195 ÷ 750 mm
Vice	410 x 100 mm
Vice opening	210 x 50 mm
Net weight	133 kg

0452

MOTORCYCLE SCISSORS LIFT

Scissor support stand suitable for use on the floor or on a motorcycle lift to repair bikes, with 2 height adjustable and removable sliding supports.



Max lifting capacity	400 kg
Platform dimensions	450 x 150 mm
Min - Max height	95 ÷ 400 mm
Stand height	55 - 80 mm
Hexagon	22 mm
Net weight	14 kg

0241

MOTORCYCLE WHEEL BLOCK

Strong body, simple and easy use, adjustable wheel size, safety lock.



Wheel outer diameter	381 - 533 mm
Overall dimensions	730 x 468 x 440h mm
Net weight	10 kg

S013

HYDRAULIC LIFT TABLE

With foot pump and pneumatic control.



Max lifting capacity	600 kg
Platform dimensions	2000 x 1220 mm
Total length	2575 mm
Min - Max height	185 ÷ 825 mm
Net weight	230 kg

0430

MOTORCYCLE DOLLY

Powder coated steel. it is suitable for motorcycles and scooters that have the side stand. it allows you to move and to park your bike in tight spaces



Maximum capacity	300 kg
Length	1929 mm
Net weight	33 kg

0217

VEHICLE POSITIONING JACK

With wheel positioning brakes.



Capacity	680 kg
Lateral stroke	370 mm
Working range	710 - 340 mm
Max tire width	325 mm
Overall dimensions	730 x 468 x 440h mm
Net weight	15 kg

S017
UNIVERSAL TELESCOPIC CART

Adjustable in height and length, made of square steel pipes, after use it can be stored in small space, upper sides with rubber to prevent scratches and give more stability to the leaned object, 4 swivel casters of which 2 with brake, ideal for the car body repair, for repairing and spraying area



Height min - max	840 ÷ 1320 mm
Length	225 ÷ 1380 mm
Width	860 mm
Capacity	100 kg
Net weight	26 kg

0645/CC
THREE-DRAWER CAR SEAT

Equipped with 3 drawers with bearings, 3 can trays and a small frontal tray, 4 pivoting wheels.



Dimensions	370 x 400 x 367h mm
Drawer dimensions	3 - 150 x 300 x 40 h mm
Net weight	8 kg

0645/C
6 WHEELS CAR CREEPER


Dimensions	1030 x 420 x 100h mm
Net weight	6,5 kg

0645/S
SHOP SEAT

With pivoting wheels, tool holder base, seat with padding.



Dimensions	440 x 375 x 400 mm
Net weight	4,2 kg

0645/CP
PLASTIC CREEPER

Shockproof, with 6 wheels.



Dimensions	1000 x 470 x 120h mm
Net weight	4,8 kg

0645/SS
2 IN 1 CREEPER AND SEAT


Creeper dimensions	1020 x 410 x 150h mm
Seat dimensions	550 x 410 x 500h mm
Net weight	9 kg

**0256-****HYDRAULIC RAM**

Art.	Maximum capacity	Working pressure	Min-max lifting height	Spindle	Ram stroke	Dimensions	Net weight
0256/05	5 ton	63 Mpa	33 ÷ 39 mm	ø 24 mm	6 mm	45 x 95 mm	0,6 kg
0256/10	10 ton	63.7 Mpa	44 ÷ 55 mm	ø 38 mm	11 mm	56 x 118 mm	1,3 kg
0256/20	20 ton	63.7 Mpa	52 ÷ 63 mm	ø 50 mm	11 mm	76 x 138 mm	2,6 kg
0256/30	30 ton	63.7 Mpa	60 ÷ 72 mm	ø 63 mm	12 mm	95 x 158 mm	4,4 kg
0256/50	50 ton	63.7 Mpa	66 ÷ 78 mm	ø 70 mm	12 mm	118 x 186 mm	6,7 kg

0062-**BOTTLE JACK**

Hydraulic jack. It provides an excellent stability thanks to its small size. Easy to carry and use.



Art.	Capacity	Min. height	Lifting	Adjusting height	Base dimensions	Ram diameter	Net weight
0062/2	2 ton	181 mm	116 mm	48 mm	90 x 85 mm	Ø 22 mm	2,7 kg
0062/5	5 ton	220 mm	127 mm	70 mm	115 x 100 mm	Ø 32 mm	4,3 kg
0062/10	10 ton	230 mm	150 mm	80 mm	125 x 110 mm	Ø 40 mm	6,5 kg
0062/15	15 ton	230 mm	150 mm	80 mm	140 x 135 mm	Ø 48 mm	8,3 kg
0062/20	20 ton	242 mm	150 mm	60 mm	155 x 145 mm	Ø 53 mm	10,5 kg
0062/32	32 ton	285 mm	180 mm	-	170 x 160 mm	Ø 56 mm	13,5 kg
0062/50	50 ton	295 mm	180 mm	-	215 x 175 mm	Ø 85 mm	29 kg



0010
LIFT TROLLEY

With foldable handle, mechanical blocking system of the platform, swivel wheels with brakes.



Capacity	500 kg
Table dimensions	850 x 500 x 50 mm
Lifting	290 ÷ 880 mm
Net weight	86 kg


0075
LIFT TROLLEY

With foldable handle with mechanical blocking system, swivel wheels with brakes.



Capacity	300 kg
Table dimensions	850 x 500 x 50 mm
Lifting	290 ÷ 880 mm
Net weight	78 kg


0467
HIGH LIFT TROLLEY

With double scissor action, mechanical blocking system of the platform, swivel wheels with brakes.



Capacity	350 kg
Table dimensions	910 x 500 x 53 mm
Lifting	370 ÷ 1300 mm
Net weight	92 kg



**C650****THREE SHELVES TROLLEY**

Strong and easy to assemble, 2 swivel and 2 fixed casters.



Dimensions	800 x 450 x 800h mm
Steel thickness	1.5 mm
Wheels	ø 80 mm
Capacity	100 kg
Net weight	17 kg

C750**THREE SHELVES TROLLEY**

Strong and easy to assemble, 2 swivel and 2 fixed casters.



Dimensions	940 x 600 x 870h mm
Steel thickness	2,3 mm
Wheels	ø 150 mm
Capacity	200 kg
Net weight	52 kg

C065/2**PP TWO SHELVES TOOL CART**

Light weight, strong and easy to assemble, 2 swivel and 2 fixed casters.



Dimensions	1010 x 440 x 840h mm
Wheels	ø 125 mm
Capacity	250 kg
Working temperature	-20°C a +50°C
Net weight	15,5 kg

C075/2**PP TWO SHELVES TOOL CART**

Light weight, strong and easy to assemble, 2 swivel and 2 fixed casters.



Dimensions	1170 x 652 x 840h mm
Wheels	ø 125 mm
Capacity	250 kg
Net weight	22,5 kg

C009**CART WITH WOODEN SHELF**

Cart made of steel, with 2 fixed wheels and 2 swivel wheels with brake.



Overall dimensions	1000 x 800 x 810 h mm
Steel thickness	2 mm
Plate thickness	36 mm
Wheels	ø 150 mm
Capacity	150 kg
Net weight	52 kg

Cx**PVC PLATFORM TROLLEY**

With foldable handle, 2 fixed casters and 2 swivel casters.



Art.	Wheels	Capacity	Platform dimensions	Height	Net weight
C150	Ø 100 mm	150 kg	700 x 450 mm	820 mm	7,8 kg
C300	Ø 125 mm	300 kg	900 x 600 mm	890 mm	13,4 kg

C170P
NEW
FOLDING ALUMINIUM HAND TRUCK

Folding hand truck with automatic opening through a simple push on the toe plate. Automatic locking in the open or closed position. Telescopic structure and toe plate in aluminum.



Wheel sizes	Ø 125 x 28 mm
Hole diameter	6 mm
Capacity	70 kg
Toe plate dimensions	385 x 275 mm
Net weight	3,00 kg
Dimensions	385 x 410 x 985 h mm
Overall dimensions	385 x 55 x 635 h mm

C1101
NEW
HAND TRUCK WITH SOLID WHEELS

For flower pots and boxes, safety handles, epoxy painting.



Wheel sizes	Ø 200 x 40 mm
Hole diameter	12 mm
Capacity	80 kg
Toe plate dimensions	350 x 180 mm
Net weight	5,70 kg
Dimensions	460 x 370 x 1000 h mm

C1102
NEW
HAND TRUCK WITH PNEUMATIC WHEELS

For flower pots and boxes, safety handles, epoxy painting.



Pneumatic wheels	Ø 260 x 85 mm
Capacity	200 kg
Toe plate dimensions	450 x 215 mm
Net weight	8,5 kg

C182
ALUMINIUM HAND TRUCK WITH PNEUMATIC WHEELS

Aluminium.



Pneumatic wheels	Ø 260 x 85 mm
Capacity	200 kg
Toe plate dimensions	300 x 205 mm
Net weight	6 kg

C189
MULTIFUNCTION HAND TRUCK

With pneumatic wheels for firewood, pots, boxes and other objects. strong, easy to handle and versatile. Plastic handles.



Pneumatic wheels	Ø 260 x 85 mm
Capacity	150 kg
Toe plate dimensions	400 x 250 mm
Movable grid	340 x 390 mm
Net weight	11,5 kg

C183
NEW
STAIR-CLIMBING HAND TRUCK

Safety handles, epoxy painting.



Wheel sizes	Ø 155 x 42 mm
Hole diameter	16 mm
Capacity	200 kg
Toe plate dimensions	310 x 220 mm
Net weight	13,5 kg
Dimensions	500 x 620 x 1180 h mm

**C184****NEW****2-IN-1 HAND TRUCK**

Can be used in two positions to facilitate the handling of heavy and bulky loads.



Pneumatic wheels	Ø 260 x 83 mm
Mobile wheels	Ø 100 x 23 mm
Hole diameter	20 mm - 10 mm
Capacity	250 kg
Toe plate dimensions	390 x 140 mm
Movable grid	325 x 335 mm
Platform dimensions	380 x 850 mm
Net weight	12 kg
Dimensions	590 x 420 x 1117 h mm - 590 x 1117 x 1050 h mm

P019**FOLDING ANTISLIP PLATFORM**

Antislip professional, made of aluminum, easy to use, suitable for a wide range of activities in different sectors, such as: home, auto and others.



Capacity	150 kg
Dimensions	1260x380x500 mm
Platform dimensions	950x300 mm
Net weight	7,5 kg

0237-**LEVER CHAIN HOIST**

Art.	Capacity	Lifting	Net weight
0237/05	500 kg	1500 mm	5 kg
0237/15	1500 kg	1500 mm	10 kg

0461**POLYURETHANE WHEEL**

260 x 85 mm not pierceable, with Ø 20 mm bearing and adapter from 20 mm to 18 mm, for hand trucks with 18-20 mm wheel shaft.



Wheel sizes	250 x 75 mm
Hole sizes	Ø 20 - 18 x 74 mm

0056-**CHAIN HOIST**


Art.	Capacity	Lifting	Net weight
0056/1	1000 kg	3000 mm	11 kg
0056/2	2000 kg	3000 mm	20 kg

0236**HOIST ARM**

Capacity	300 kg
Arm length	750 mm
Slot distance	380 mm
Stem	45 X 45 mm ²
Net weight	6 kg

0602
ELECTRIC CABLE HOIST


With steel cable and mechanical limit switch.

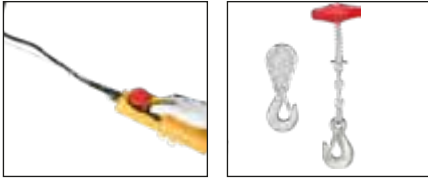

Capacity	200 / 400 kg
Cable length	18 m
Speed	8 m/min
Motor	230 V 50 Hz 1 kW
Net weight	16,7 kg


0600
ELECTRIC CABLE HOIST

With steel cable and mechanical limit switch

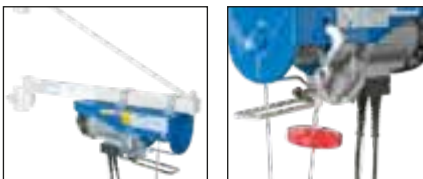

Capacity	200 / 400 kg
Cable length	18 m
Speed	8 m / min
Motor	230 V 50 Hz 0,75 kW
Net weight	16,7 kg


Sx
MAGNETIC LIFTER

Neodymium.

Art.	Maximum capacity	Round bar lifting cap.	Min-max lifting diameter	Dimensions	Net weight
S0300	300 kg	100 kg	50 ÷ 300 mm	189 x 163 x 92 (B) mm	9,5 kg
S0600	600 kg	200 kg	70 ÷ 400 mm	267 x 198 x 129 (B) mm	19 kg
S1000	1000 kg	330 kg	75 ÷ 450 mm	350 x 277 x 156 (B) mm	36 kg


PDC4-
CHAIN SLINGS

Grade 80 alloy steel with shortening hook, security factor 4:1, the vertical capacity is calculated on 3 arms only because the fourth arm is necessary only to equilibrate the loading. EN 818-4.



Art.	Length	Capacity 0°	Capacity 45°	Chain	Hook
PDC4/7/2	2000 mm	3150	2240	ø 7 mm	SLF
PDC4/7/3	3000 mm	3150	2240	ø 7 mm	SLF
PDC4/7/4	4000 mm	3150	2240	ø 7 mm	SLF
PDC4/10/2	2000 mm	6700	4750	ø 10 mm	SLF
PDC4/10/3	3000 mm	6700	4750	ø 10 mm	SLF
PDC4/10/4	4000 mm	6700	4750	ø 10 mm	SLF



**PDC2-****CHAIN SLINGS**

Grade 80 alloy steel, with shortening hooks, security factor 4:1. EN 818-4.



Art.	Length	Capacity 0°	Capacity 45°	Chain	Hook
PDC2/7/2	2000 mm	2120	1500	ø 7 mm	SLF
PDC2/7/3	3000 mm	2120	1500	ø 7 mm	SLF
PDC2/7/4	4000 mm	2120	1500	ø 7 mm	SLF
PDC2/10/2	2000 mm	4250	3150	ø 10 mm	SLF
PDC2/10/3	3000 mm	4250	3150	ø 10 mm	SLF
PDC2/10/4	4000 mm	4250	3150	ø 10 mm	SLF

**PDC1-****CHAIN SLINGS**

Grade 80 alloy steel, with shortening hook, security factor 4:1. EN 818-4.



Art.	Length	Vertical capacity	Chain	Hook
PDC1/7/1	1000 mm	1500 kg	ø 7 mm	SLF
PDC1/7/2	2000 mm	1500 kg	ø 7 mm	SLF
PDC1/10/1	1000 mm	3150 kg	ø 10 mm	SLF
PDC1/10/2	2000 mm	3150 kg	ø 10 mm	SLF

**06x****LASHING SYSTEM WITH POLYESTER RIBBON DRAFT**

EN 12195-2.



Art.	Strap ribbon with turnbuckle	Ribbon width	Capacity	Hooks
0635	5,50 + 0,50 m	35 mm	1000 kg	2
0650	8,00 + 0,50 m	50 mm	2000 kg	2
0675	10,00 + 1,00 m	75 mm	3000 kg	2

0635/25**LASHING SYSTEM WITH POLYESTERE RIBBON DRAFT**

EN 12195-2.



Strap ribbon mm 25 with turnbuckle and 2 hooks	4,00 + 0,30 m
Capacity	250 kg

AN2G/12/1**2 STEEL ARMS PENDING**

Rope	ø 12 mm
Length	1000 mm
Capacity	30° 2600 kg
Capacity	90° 2100 kg

x-1000
POLYESTER COLORED SLINGS

Double layer band lifting system, standard, security factor 7:1. EN 1492-1.

Art.	m	Width	Color	Eye length	Vertical capacity	Capacity basket	Basket capacity β 45° kg	Basket capacity β 60° kg	Capacity choker
1/1000	1	50 mm	Purple	250 mm	1000 kg	2000 kg	1400	1000	800 kg
2/1000	2	50 mm	Purple	250 mm	1000 kg	2000 kg	1400	1000	800 kg
3/1000	3	50 mm	Purple	250 mm	1000 kg	2000 kg	1400	1000	800 kg
4/1000	4	50 mm	Purple	250 mm	1000 kg	2000 kg	1400	1000	800 kg


x-2000
POLYESTER COLORED SLINGS

Double layer band lifting system, security factor 7:1. EN 1492-1.

Art.	m	Width	Color	Eye length	Vertical capacity	Capacity basket	Basket capacity β 45° kg	Basket capacity β 60° kg	Capacity choker
1/2000	1	60 mm	Green	250 mm	2000 kg	4000 kg	2800	2000	1600 kg
2/2000	2	60 mm	Green	250 mm	2000 kg	4000 kg	2800	2000	1600 kg
3/2000	3	60 mm	Green	250 mm	2000 kg	4000 kg	2800	2000	1600 kg
4/2000	4	60 mm	Green	250 mm	2000 kg	4000 kg	2800	2000	1600 kg
5/2000	5	60 mm	Green	250 mm	2000 kg	4000 kg	2800	2000	1600 kg
6/2000	6	60 mm	Green	250 mm	2000 kg	4000 kg	2800	2000	1600 kg


x-3000
POLYESTER COLORED SLINGS

Double layer band lifting system, security factor 7:1. EN 1492-1.

Art.	m	Width	Color	Eye length	Vertical capacity	Capacity basket	Basket capacity β 45° kg	Basket capacity β 60° kg	Capacity choker
1/3000	1	90 mm	Yellow	300 mm	3000 kg	6000 kg	4200	3000	2400 kg
2/3000	2	90 mm	Yellow	300 mm	3000 kg	6000 kg	4200	3000	2400 kg
3/3000	3	90 mm	Yellow	300 mm	3000 kg	6000 kg	4200	3000	2400 kg
4/3000	4	90 mm	Yellow	300 mm	3000 kg	6000 kg	4200	3000	2400 kg
5/3000	5	90 mm	Yellow	300 mm	3000 kg	6000 kg	4200	3000	2400 kg
6/3000	6	90 mm	Yellow	300 mm	3000 kg	6000 kg	4200	3000	2400 kg


FTx-1000
POLYESTER ROUND SLINGS

External sleeve security factor 7:1. EN 1492-2.

Art.	Ring	Color	Vertical	Capacity basket	Basket capacity β 45° kg	Basket capacity β 60° kg	Capacity choker
FT1/1000	1 m	Purple	1000 kg	2000 kg	1400	1000	800 kg
FT2/1000	2 m	Purple	1000 kg	2000 kg	1400	1000	800 kg
FT3/1000	3 m	Purple	1000 kg	2000 kg	1400	1000	800 kg
FT4/1000	4 m	Purple	1000 kg	2000 kg	1400	1000	800 kg
FT5/1000	5 m	Purple	1000 kg	2000 kg	1400	1000	800 kg
FT6/1000	6 m	Purple	1000 kg	2000 kg	1400	1000	800 kg


FTx-2000
POLYESTER ROUND SLINGS

External sleeve security factor 7:1. EN 1492-2.

Art.	Ring	Color	Vertical	Capacity basket	Basket capacity β 45° kg	Basket capacity β 60° kg	Capacity choker
FT1/2000	1 m	Green	2000 kg	4000 kg	2800	2000	1600 kg
FT2/2000	2 m	Green	2000 kg	4000 kg	2800	2000	1600 kg
FT3/2000	3 m	Green	2000 kg	4000 kg	2800	2000	1600 kg
FT4/2000	4 m	Green	2000 kg	4000 kg	2800	2000	1600 kg
FT5/2000	5 m	Green	2000 kg	4000 kg	2800	2000	1600 kg
FT6/2000	6 m	Green	2000 kg	4000 kg	2800	2000	1600 kg


FTx-3000
POLYESTER ROUND SLINGS

External sleeve security factor 7:1. EN 1492-2.

Art.	Ring	Color	Vertical	Capacity basket	Basket capacity β 45° kg	Basket capacity β 60° kg	Capacity choker
FT1/3000	1 m	Yellow	3000 kg	6000 kg	4200	3000	2400 kg
FT2/3000	2 m	Yellow	3000 kg	6000 kg	4200	3000	2400 kg
FT3/3000	3 m	Yellow	3000 kg	6000 kg	4200	3000	2400 kg
FT4/3000	4 m	Yellow	3000 kg	6000 kg	4200	3000	2400 kg
FT5/3000	5 m	Yellow	3000 kg	6000 kg	4200	3000	2400 kg
FT6/3000	6 m	Yellow	3000 kg	6000 kg	4200	3000	2400 kg



**0791-****WIRE ROPE PULLING HOIST**

For pulling and lifting.



Art.	Max load	Cable	Net weight
0791/08	800 kg	ø 8,3 mm x 20m	11 kg
0791/16	1600 kg	ø 11mm x 20m	24 kg
0791/32	3200 kg	ø 16 mm x 20m	50 kg

0066**DOUBLE RATCHET HAND PULLER**

Max load	800 kg
Cable diameter	ø 5 mm
Max length	2 m
Net weight	2,7 kg

0070/C**GEARED HAND WINCH**


Zinc-plated.



Max load	500 kg
Throat width	50 mm
Max ø wheel	133 mm
Min. ø wheel	40 mm
Cable size	ø 4,5 mm x 10 m
Base dimensions	140 x 90 mm

0070**GEARED HAND WINCH**

Frame in galvanized steel. Ergonomic handle.

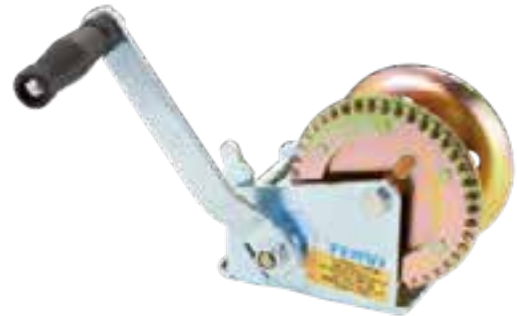

Max load	500 kg
Throat width	50 mm
Max ø wheel	133 mm
Min. ø wheel	40 mm
Base dimensions	140 x 90 mm

0590**HAND OPERATED WINCH WITH BRAKE**

Max load	450 kg
Throat width	49 mm
Max ø wheel	110 mm
Min. ø wheel	45 mm
Overall dimensions without handle	170 x 150 x 125h mm



0068/S
TRUCK PALLET WITH SCALE AND PRINTER

Not legal for trade, tare function powered by rechargeable battery, polyurethane wheels.



Capacity	2000 kg
Weight capacity	2000 kg
Fork height	88 ÷ 200 mm
Fork dimensions	1150 x 568 mm
Reading	1 kg
Accuracy	±2 kg
Printer	Yes
Front wheel	Double
Net weight	160 kg

0068L
TRUCK PALLET WITH SCALE

Truck pallet with scale not legal for trade, tare function powered by replaceable batteries. With polyurethane wheels.



Capacity	2000 kg
Weight capacity	2000 kg
Fork height	85 ÷ 175 mm
Fork dimensions	1150 x 570 mm
Reading	0,5 kg
Accuracy	±0,05% kg
Front wheel	Double
Net weight	125 kg

0028R
LOWERED MANUAL PALLET TRUCK

With polyurethane wheels.



Capacity	2500 kg
Fork height	63 ÷ 165 mm
Fork dimensions	1150 x 540 mm
Armor plate thickness	3 mm
Front wheel	Double
Net weight	68,5 kg

0028
MANUAL TRUCK -PALLET


With polyurethane wheels.



Capacity	2500 kg
Fork height	85 ÷ 200 mm
Fork dimensions	1150 x 540 mm
Armor plate thickness	3 mm
Front wheel	Double
Net weight	71,5 kg

0028-XL
MANUAL TRUCK-PALLET LONG FORKS

With polyurethane wheels.

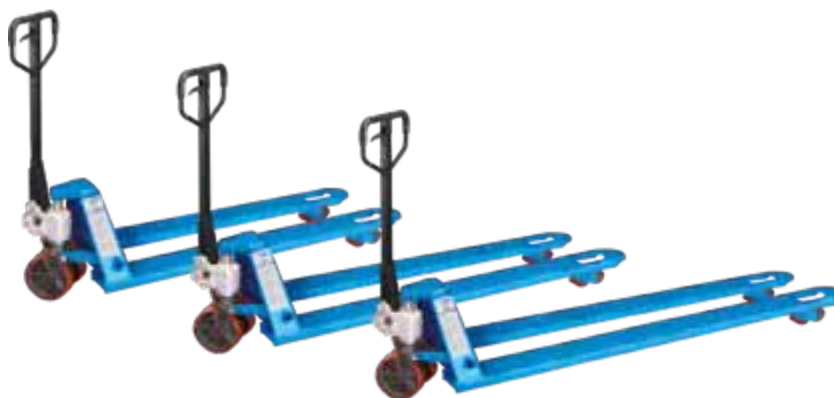NEW


Art.	Capacity	Fork height	Fork dimensions	Armor plate thickness	Front wheel	Net weight
0028/1500	2000 kg	85 ÷ 200 mm	1500 x 540 mm	3 mm	Double	86 kg
0028/1800	2000 kg	85 ÷ 200 mm	1800 x 540 mm	3 mm	Double	96 kg
0028/2000	2000 kg	85 ÷ 200 mm	2000 x 540 mm	3 mm	Double	102 kg



0064

MANUAL TRUCK -PALLET

With polyurethane wheels.



Capacity	2500 kg
Fork height	85 ÷ 200 mm
Fork dimensions	900 x 540 mm
Armor plate thickness	3 mm
Front wheel	Single
Net weight	68,5 kg

S2/800

HIGH LIFT TRUCK-PALLET

Scissors.



Capacity	1000 kg
Fork height	85 ÷ 800 mm
Fork dimensions	1170 x 540 mm
Tire	Polyurethane
Front wheel	Single
Net weight	117 kg



0782
PLATFORM STACKER WITH FORKS


Capacity	400 kg
Fork height	85 ÷ 1500 mm
Fork dimensions	545 x 650 mm
Platform	576 x 650 mm
Mobile wheels	Ø 127 x 40 mm
Fix wheels	Ø 75 x 40 mm
Tire	Polyurethane
Dimensions	1100 x 600 x 1725h mm
Net weight	95 kg


0143A
MANUAL STACKER

With brake and lifting foot pedal.



Capacity	1000 kg
Fork height	90 ÷ 1600 mm
Fork dimensions	1150 x 550 mm
Fork section	160 x 55 mm
Upright height	2100 mm
Tire	Polyurethane
Front wheel	Double
Dimensions	920 x 1670 x 2100h mm
Net weight	250 kg


0143/25
MANUAL STACKER

With double telescopic mast, brake and lifting pedal.



Capacity	1000 / 800 kg
Fork height	75 ÷ 1600 ÷ 2500 mm
Fork dimensions	1150 x 550 mm
Fork section	160 x 55 mm
Upright height	1840 mm
Tire	Polyurethane
Front wheel	Double
Dimensions	1670 x 920 x 1840h mm
Net weight	310 kg



**0654-xL****TRANSPORT TROLLEY**

With nylon wheels and hook for towing.



Art.	Capacity	Working height	Roller dimensions	Wheels	Table dimensions	Handle length	Handle swivel range	Dimensions	Net weight
0654/06L	6 Ton	110 mm	85 x 85 mm	8	Ø 170 mm	1080 mm	±90°	610 x 520 mm	41 kg
0654/09L	9 Ton	110 mm	85 x 85 mm	12	Ø 170 mm	1080 mm	±90°	840 x 583 mm	59 kg
0654/12L	12 Ton	110 mm	85 x 85 mm	16	Ø 170 mm	1080 mm	±90°	1030 x 620 mm	80 kg

0654-xF**TRANSPORT TROLLEY**


With nylon wheels.



Art.	Capacity	Working height	Roller dimensions	Wheels	Table dimensions	Lever bar length	Net weight
0654/06F	6 Ton	110 mm	85 x 85 mm	4	200 x 220 mm	640 ÷ 1030 mm	30 kg
0654/09F	9 Ton	110 mm	85 x 85 mm	6	200 x 320 mm	840 ÷ 1230 mm	43 kg
0654/12F	12 Ton	110 mm	85 x 85 mm	8	200 x 407 mm	1104 ÷ 1430 mm	52 kg

C030-**SCRAP DUMPING CONTAINER EQUIPPED WITH WHEELS**

Additional colors and accessories available upon request.

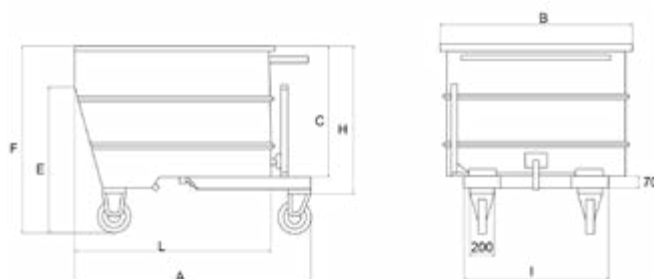

Art.	Liters	A	B	C	E	F	H	I	L	Capacity	Wheels	Net weight
C030/0300	300	1280 mm	820 mm	395 mm	530 mm	650 mm	490 mm	700 mm	1010 mm	600 kg	Ø 125 mm x 165h mm	95 kg
C030/0500	500	1280 mm	920 mm	600 mm	750 mm	915 mm	710 mm	800 mm	1010 mm	1000 kg	Ø 180 mm x 210h mm	130 kg
C030/0750	750	1280 mm	1070 mm	730 mm	800 mm	1035 mm	830 mm	800 mm	1055 mm	1350 kg	Ø 180 mm x 210h mm	150 kg
C030/1000	1000	1510 mm	1070 mm	870 mm	925 mm	1220 mm	975 mm	800 mm	1255 mm	1700 kg	Ø 200 mm x 245h mm	182 kg
C030/1350	1350	1510 mm	1320 mm	870 mm	925 mm	1220 mm	975 mm	800 mm	1255 mm	2000 kg	Ø 200 mm x 245h mm	205 kg